



Vista (SESAR 2020 Exploratory Research project)

A multi-layer model for long-term KPI alignment forecasts

Gérald Gurtner, Luis Delgado, Andrew Cook,
Jorge Martín, Samuel Cristóbal

ART workshop

17 April 2019

University of Westminster



Founding Members



Goals and objectives

Vista aims to study the main **forces** (**‘factors’**) that will shape the future of ATM in Europe at the **2035 and 2050 horizons**

More specifically:

- trade-off between, and impacts of, primary **regulatory** and **business** (market) **forces**;
- trade-offs **within** any given period;
- trade-offs **between** periods;
- whether **alignment** may be expected to **improve or deteriorate** as we move closer to Flightpath 2050’s timeframe

Focus on five stakeholders: airlines, ANSPs, airports, passengers, and environment.

Scenario definition

Vista model is a 'what-if' simulator

- *What happens if I do something in the system?*

And **not**:

- *What will happen in 2035 or 2050?*

==> **Scenario definition**. Aim is **not** to compute the likelihood of a given scenario.

==> **Factors** entering scenario subdivided into two main categories:

- **Business factors**: cost of commodities, services and technologies, volume of traffic, etc. => demand and supply
- **Regulatory factors**: from EC or other bodies, e.g. ICAO, => 'rules of the game'

Scenario definition in Vista

Scenario name	Short description
Current	'Current' situation (SEP 2014)
L35 baseline	Baseline environment in 2035 (slow economic growth and slow technological advancements)
H35 baseline	Baseline environment in 2035 (high economic growth and high technological advancements)
Non-supportive 2035	Using L35 baseline plus a poor emphasis on environmental and passenger protection and very a high price for fuel
Supportive 2035	Using L35 baseline plus a poor emphasis on environmental and passenger protection and very a high price for fuel
L50, H50, Non-supportive 2050, Supportive 2050	As per above, for 2050

Scenario definition in Vista

Foreground factors

Factor	Values
BEO1 – Fuel prices	HHH – 4 €/kg
	HH – 2 €/kg
	H – 1 €/kg
	M – 0.5 €/kg
	L – 0.3 €/kg
BTS5 – 4D trajectory operations	L – Current
	M – Moderate improvement of capacity en-route and airport
	H – High improvement of capacity
BTO4 – Passenger management tools	L – Current rule of thumb operations
	M – Passenger reaccommodation improved with wait-for-passenger rules
	H – Passenger reaccommodated to any suitable flight, advanced wait-for-passenger rules
ROR1 – Passenger provision schemes	L – Current R261
	M – Enhanced R261 and duty of care
	H – Enhanced R621 and duty of care with automatic compensation
ROR3 – Emission schemes	D – Current, low price only CO ₂ charged
	CO ₂ _H – High price only CO ₂ charged
	CO ₂ _HH – Very high price only CO ₂ charged
	CO ₂ _NO _x _H - High price NO _x also charged
	CO ₂ _Nox_HH – Very high price NO _x also charged


Grouped into **supportive** and **non-supportive** cases

Vista Model

Objectives of the model

- Vista model:
 - Simulates a **typical day** of traffic in Europe to the level of **individual passengers**
 - **Changes the operational environment** and see their impact on several stakeholders and at several levels
- Vista model takes a **holistic approach**:
 - Because the behaviour of the system is not a simple sum of the individual behaviours.
 - Because the heterogeneity of behaviours among actors shapes the system.


Multi-layered architecture of Vista

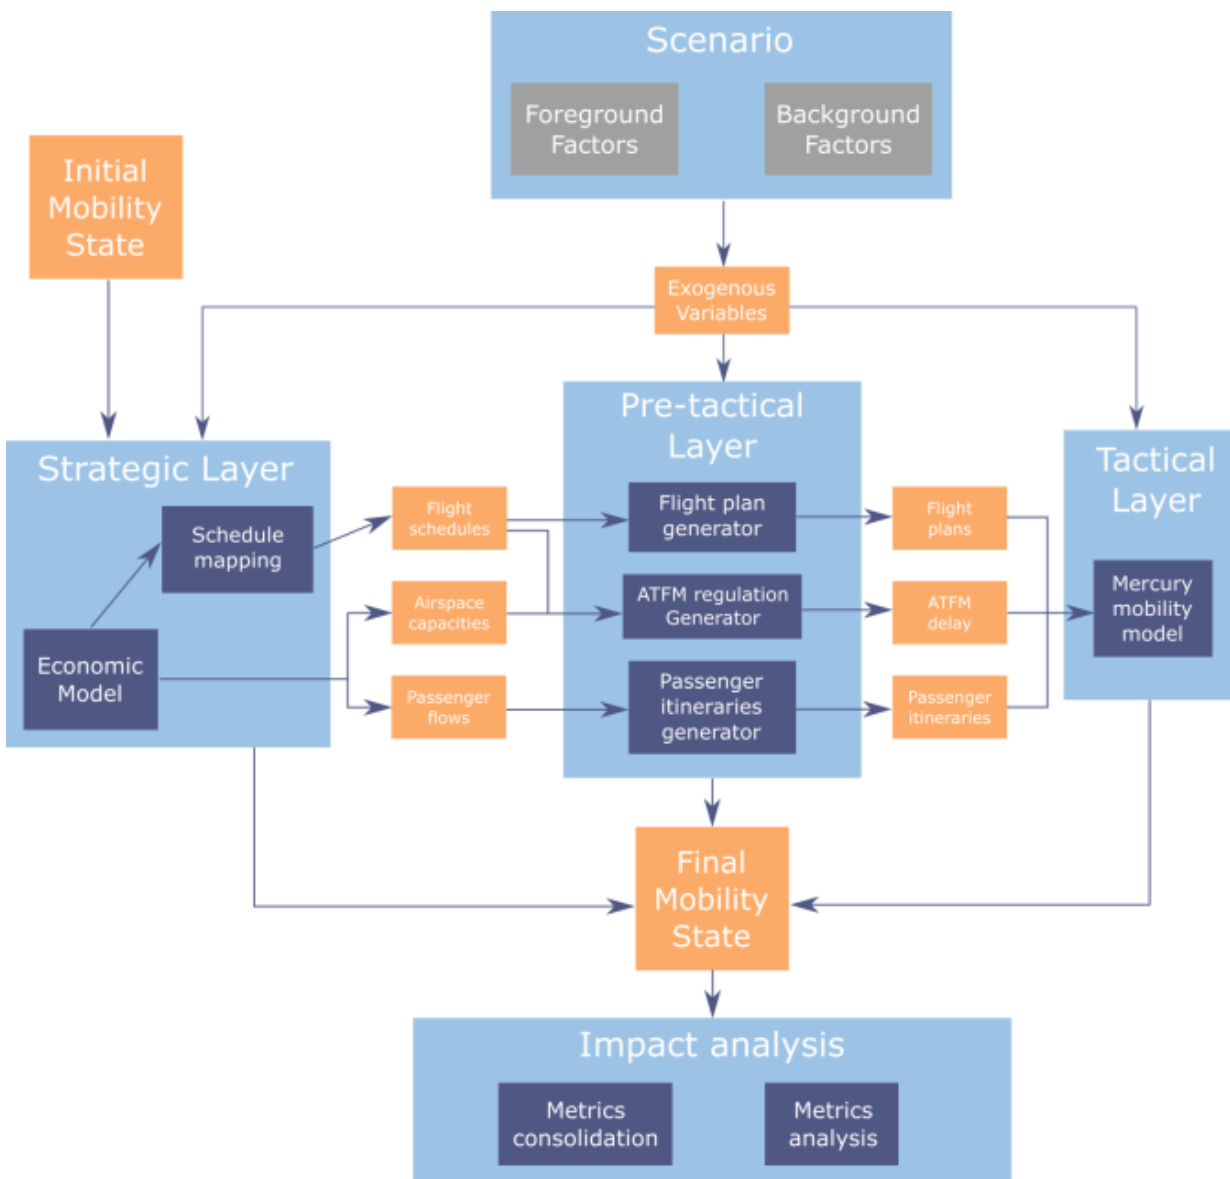

- **Airlines:** choose flights, react to delay, etc.
- **Airports:** deliver departure and arrival capacity, create congestion, etc.
- **ANSPs:** deliver ATC capacity, create regulations etc.
- **Passengers:** choose best itineraries based on fares and other parameters, make their trips with possibility of disruption, etc.
- **Environment:** is passively impacted by NO_x and CO_2

Strategic layer – economic model

Economic model: take into account **macro-economic factors** to forecast the main changes of **flows** in Europe.

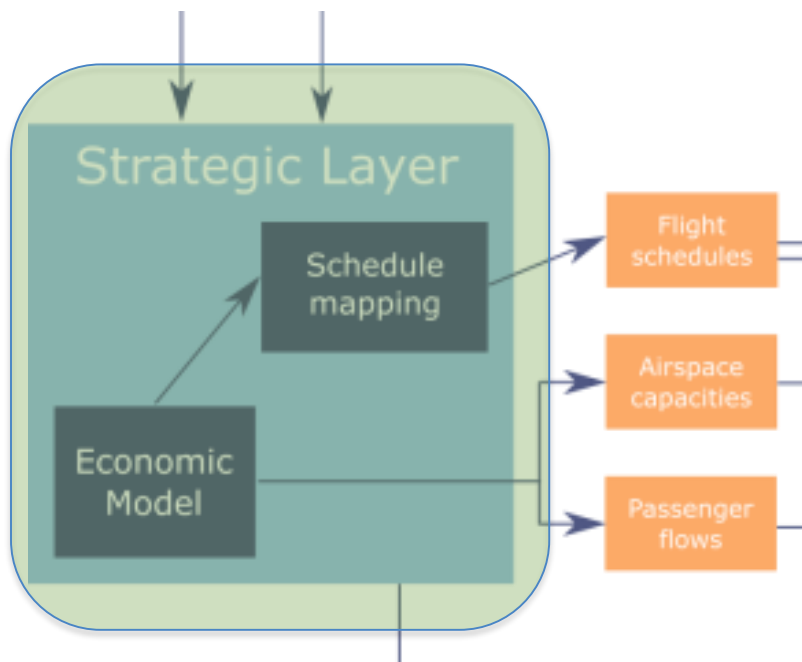

Output:

- Flows in Europe,
- Market share of different airlines
- Capacities of ANSPs and Airports
- Prices of itineraries.

Deterministic agent-based model


In a nutshell:

- Step-by-step multi-agent model
- Individual agents are currently:
 - 823 Individual airports,
 - 326 Individual airlines, part of alliances (or not), with 15 209 OD pairs,
 - 31 430 Passenger agents, aggregated at an OD level per airline,
 - 88 individual ANSPs (but only the ECAC ones are active).
- Agents compete with peers, try to predict different values (delays, future demand, prices) and act accordingly

- Airlines choose their supply, based on predicted costs (maint., crew, fuel, emissions (CO_2 , NO_x), CRCO charges, delay, uncertainty) and predicted price of tickets,
- Passengers choose between different itineraries, based on prices, frequencies, and their income,
- Supply and demand are compared, prices evolve,
- Agents compute profits and form expectations,
- ANSPs choose their capacity based on their target delay (but can't go further than a technology-fixed max. capacity) and predicted traffic,
- ANSPs set their unit rate to have zero profit.

Pre-tactical layer

- From strategic high-level to tactical executable detail

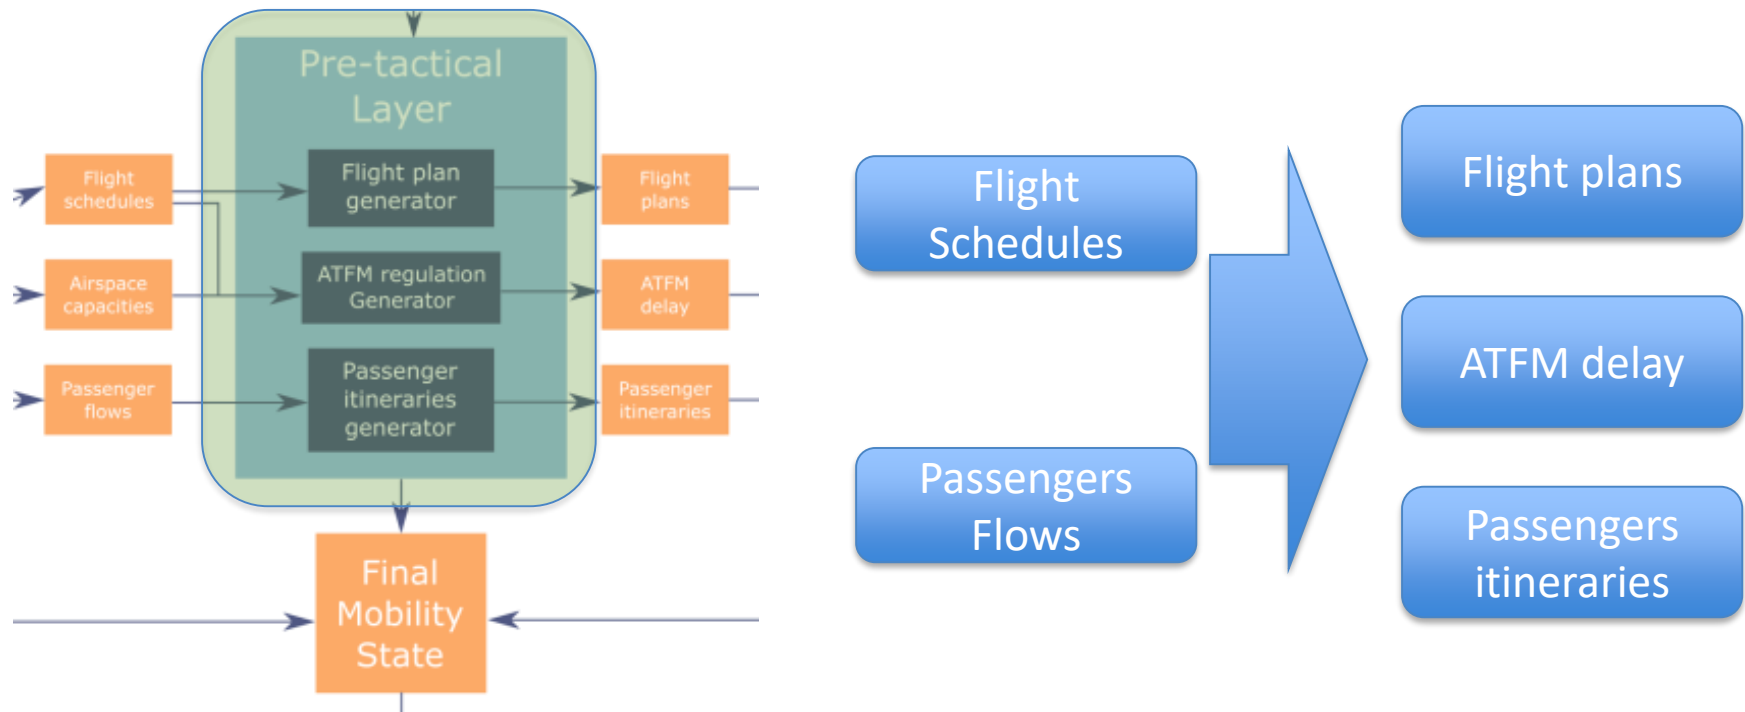

Pre-tactical layer – flight plan generation


Schedules

Fid	From	To	SOBT	SIBT	Capacity	GCD	Ac type	...
F _{AD1}	A	D	9:00	10:30	120	1234	A320	
F _{AD2}	A	D	10:45	12:20	240	954	A320	
F _{AD3}	A	D	10:50	12:20	120	2521	B737	
F _{CD1}	C	D	8:30	12:00	70	3213	B737	
...								


Flight plans

Fid	Flight plan type	Climb dist	Climb time	Cruise dist	Cruise time	Cruise speed	Cruise avg FI	Cruise avg weight	Cruise avg wind	Descent dist	Descent time
F _{AD1}	0	208	00:29	504	1:07	445N (0.77M)	380	66500	34	201	00:35
F _{AD1}	1	213	00:31	442	1:00	450N (0.78M)	360	67000	-9	224	00:36
F _{AD1}	2	194	00:29	472	1:07	446N (0.77M)	380	66000	-24	201	00:35
F _{AD1}	3	208	00:29	466	1:02	450N (0.77M)	340	67500	0	218	00:36
...											

Pre-tactical layer – flight plan generation

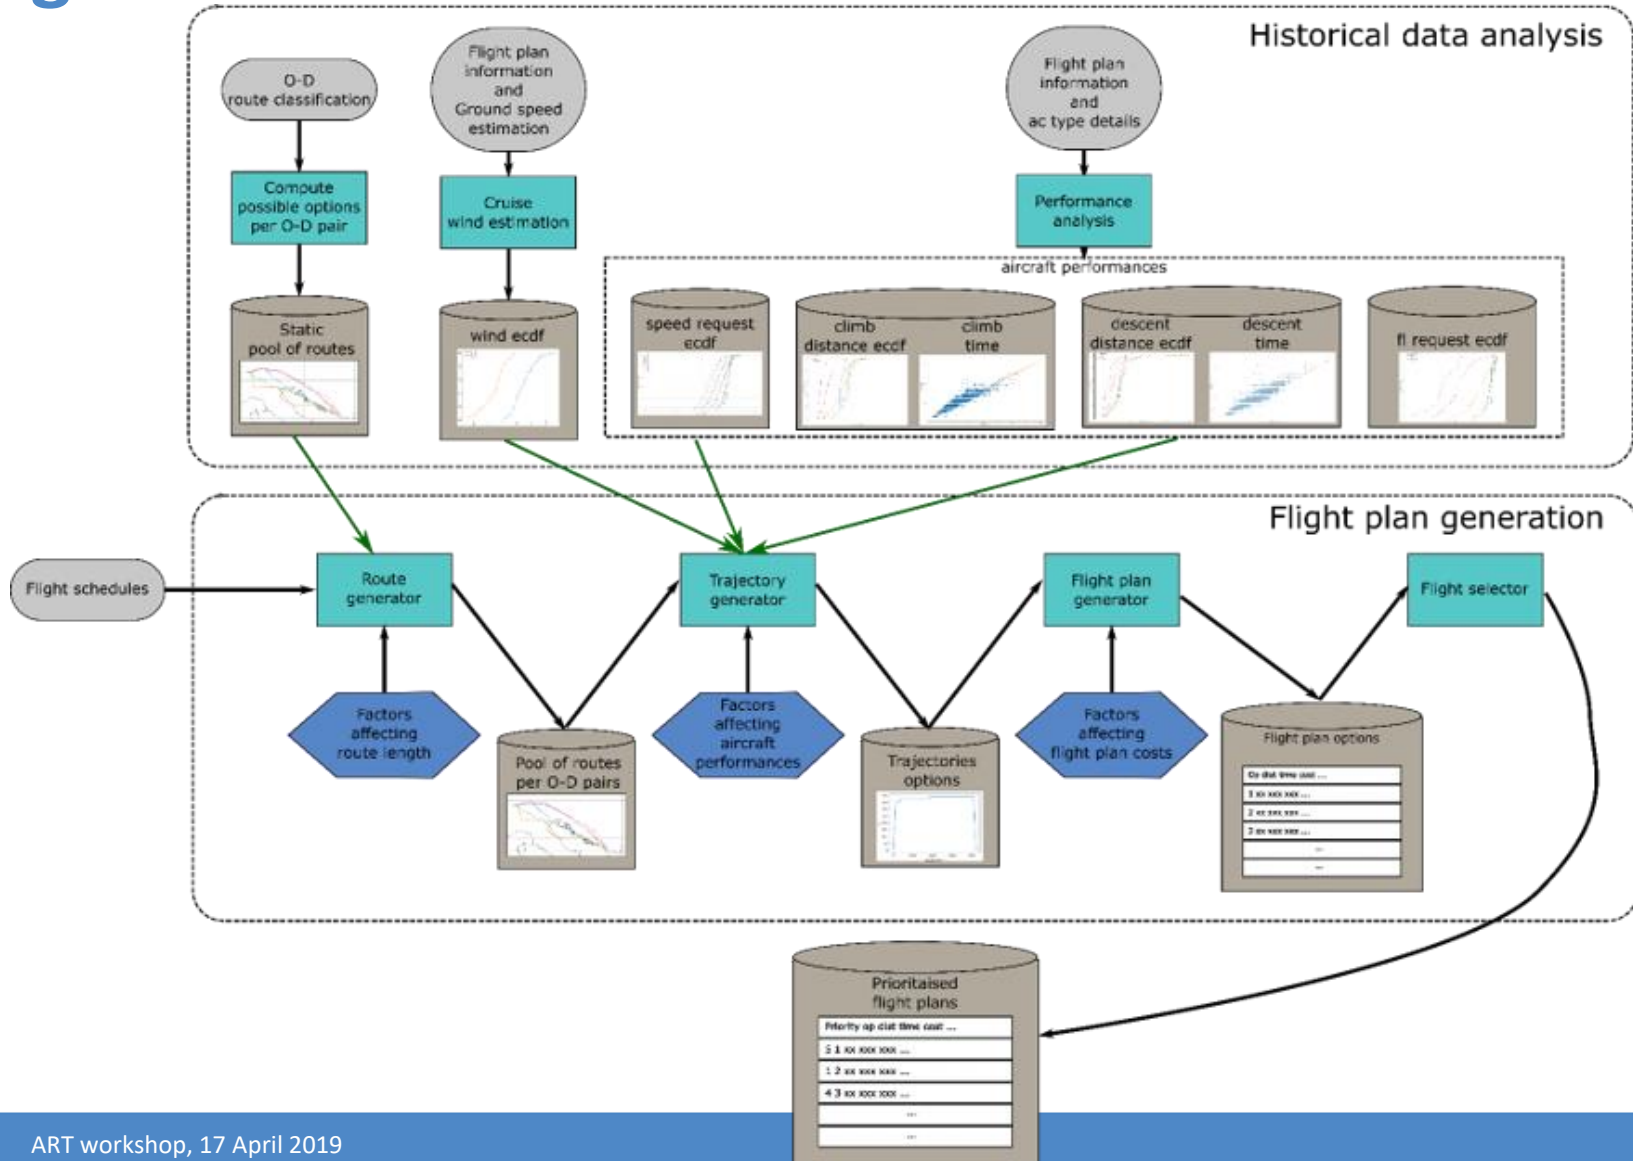

Tactical layer – Mercury

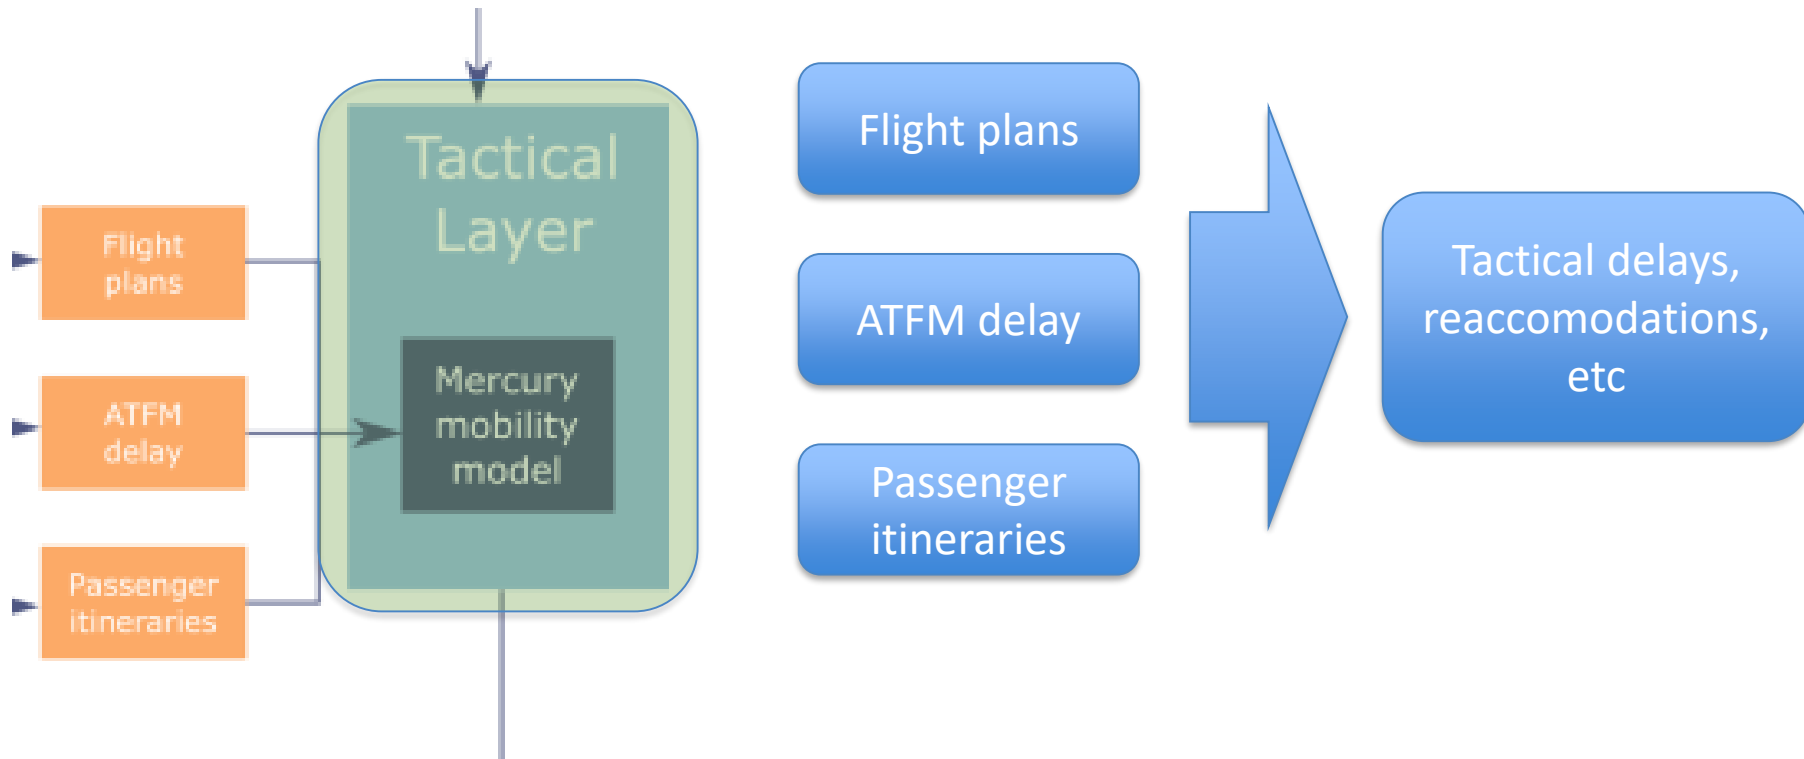


Tactical layer – Mercury




- Data-driven mesoscopic approach, stochastic modelling
- Individual passenger **door-to-door** itineraries
- Regulation 261/2004 – pax care & compensation
- Disruptions, cancelations, reaccommodations, compensation costs
- Airline decisions based on costs models or rule of thumb
- Full air traffic management model, demand/capacity balance

Vista results – overview


Strategic metrics

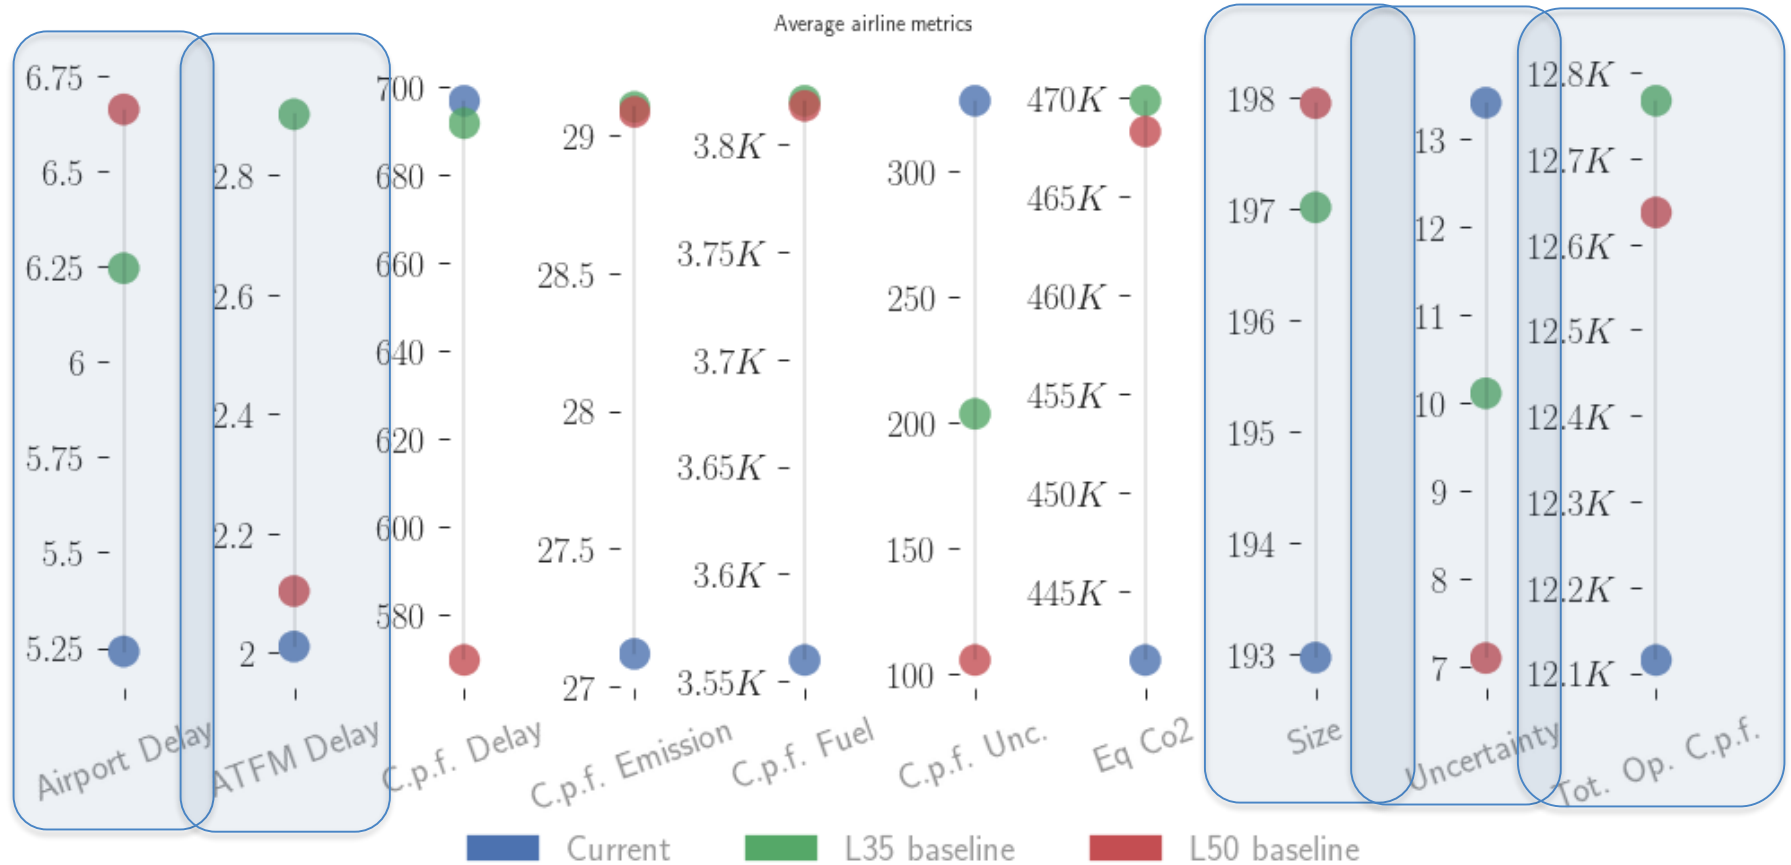


Strategic metrics

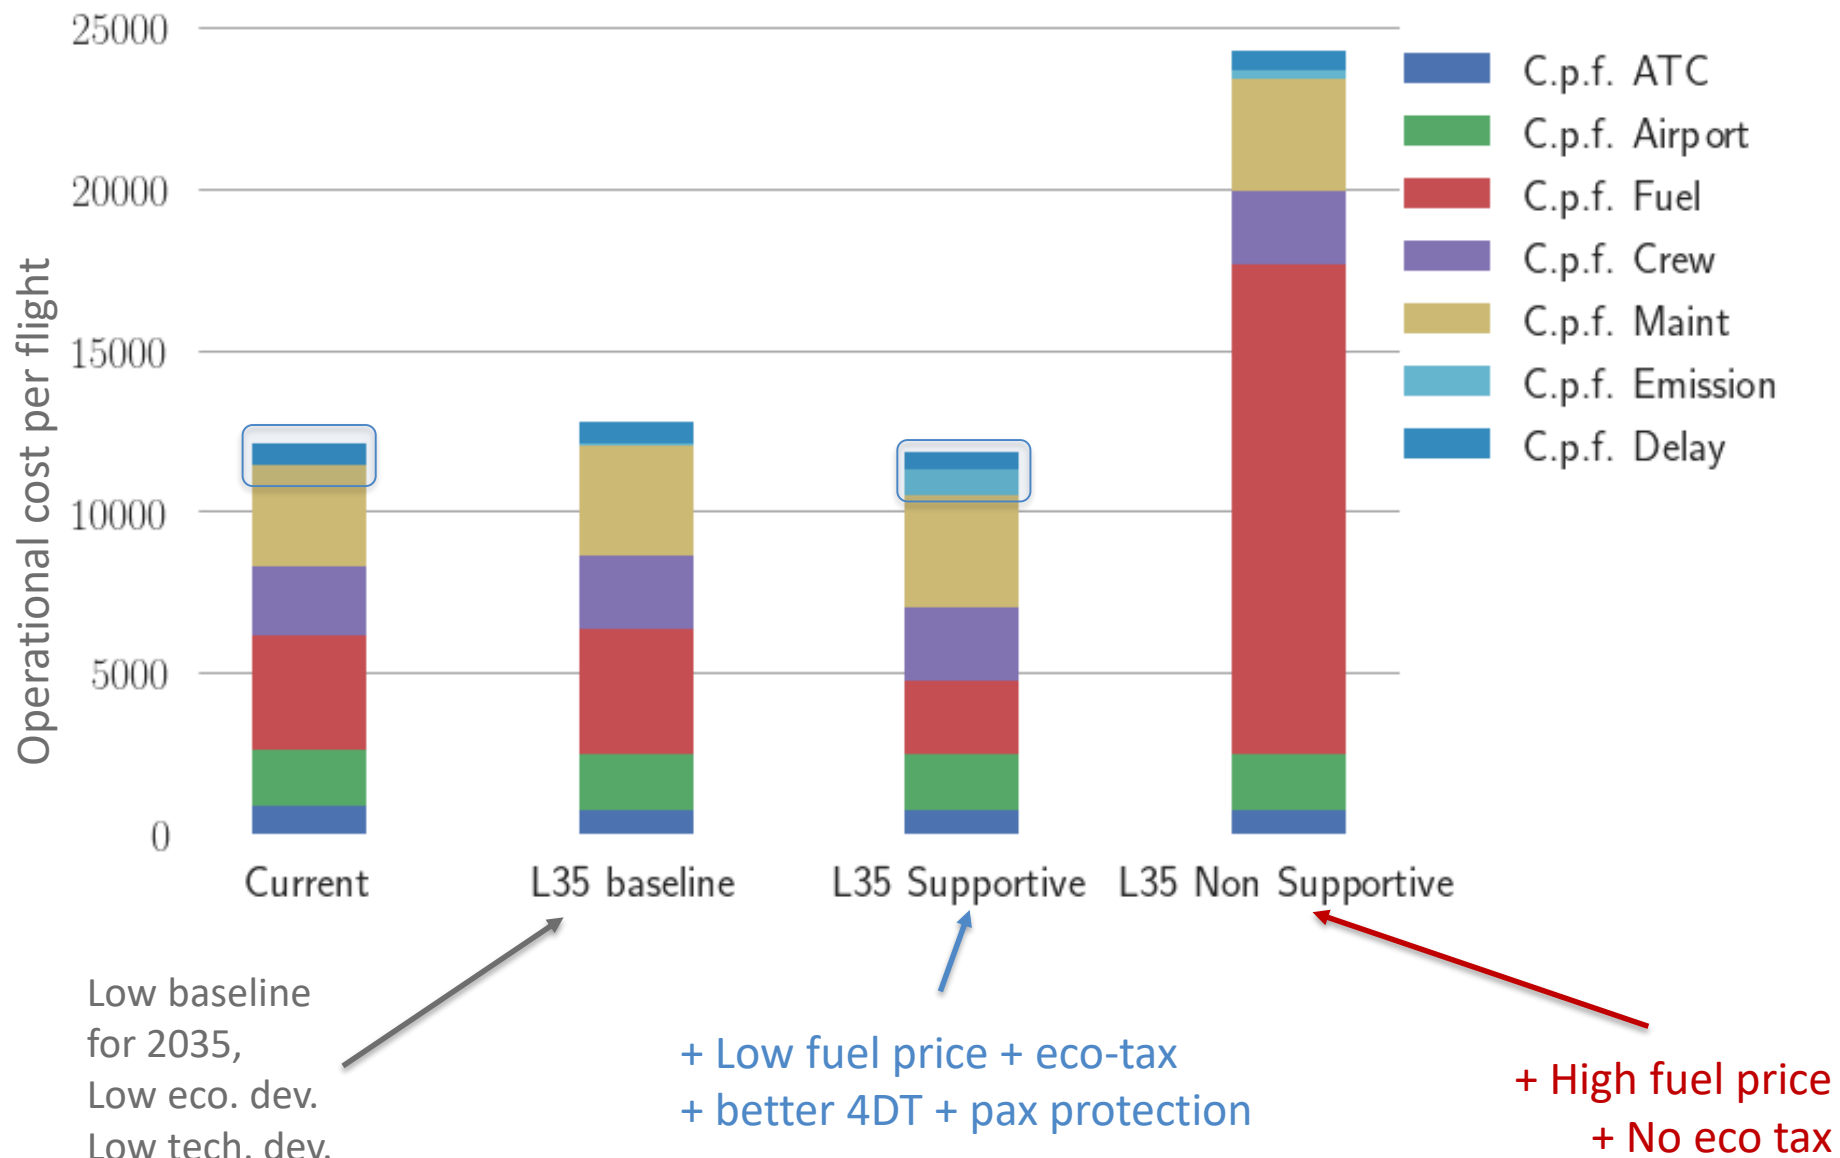


Pre-tactical metrics

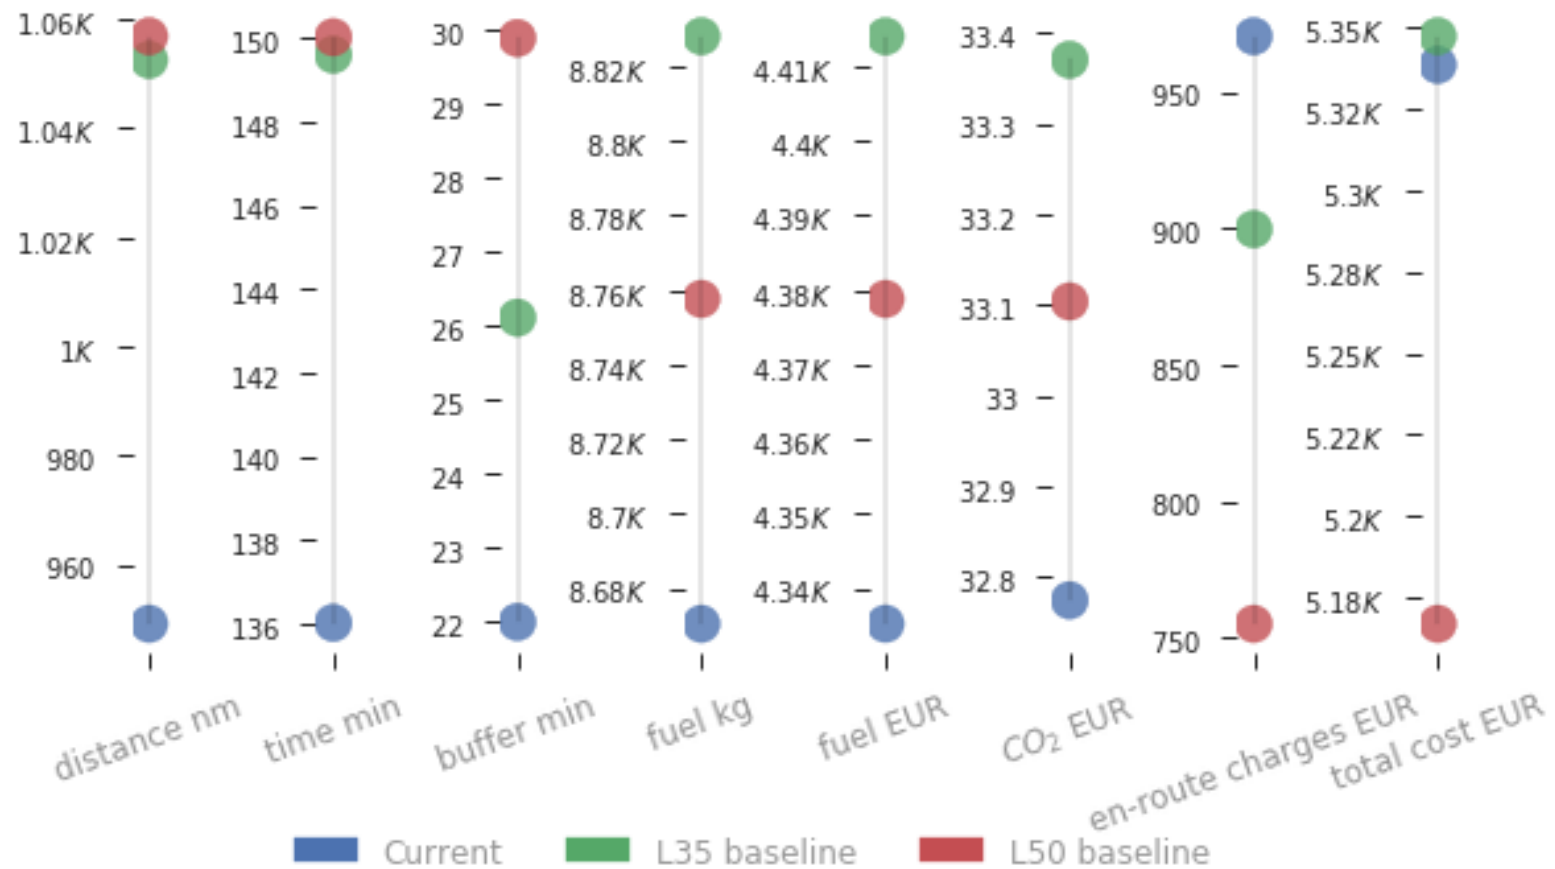


Pre-tactical metrics

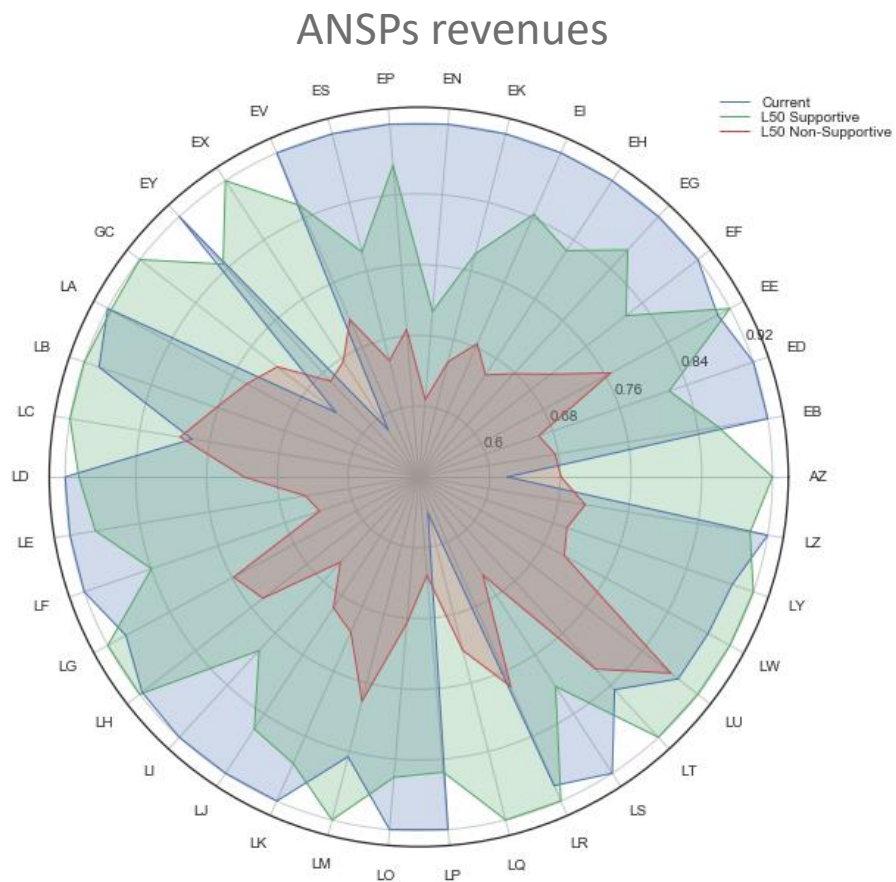


Pre-tactical metrics

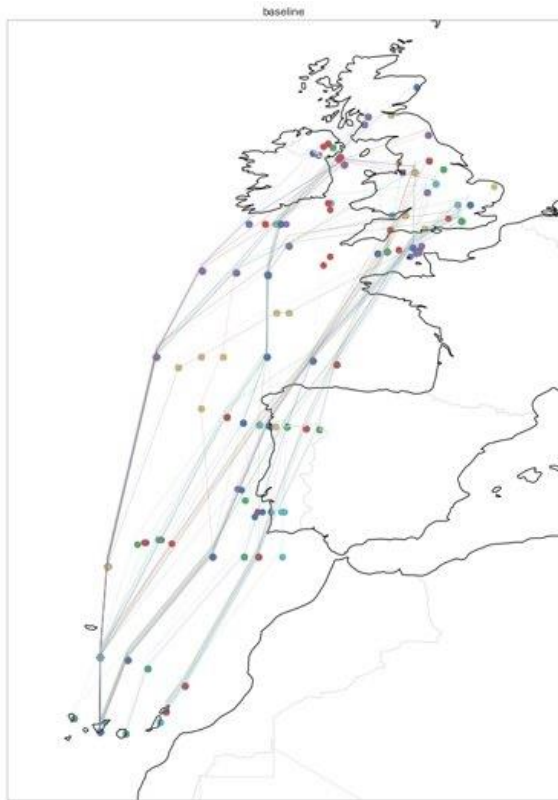


Demand variation

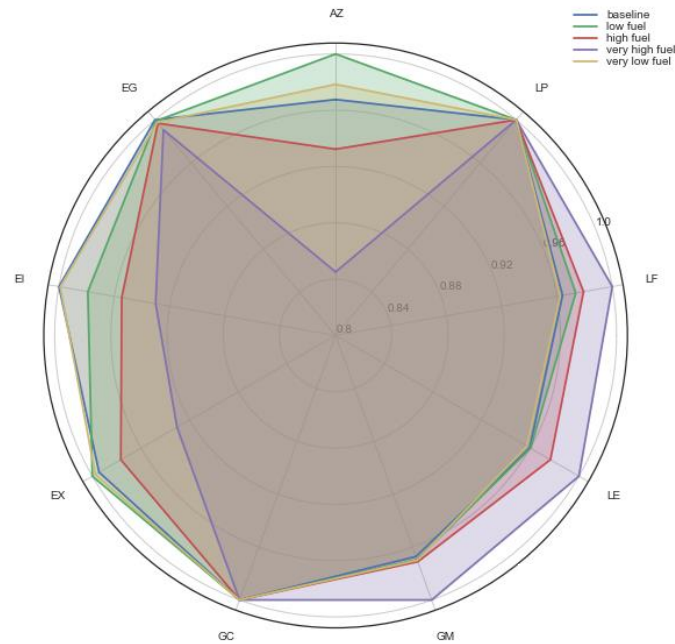


Revenue variation

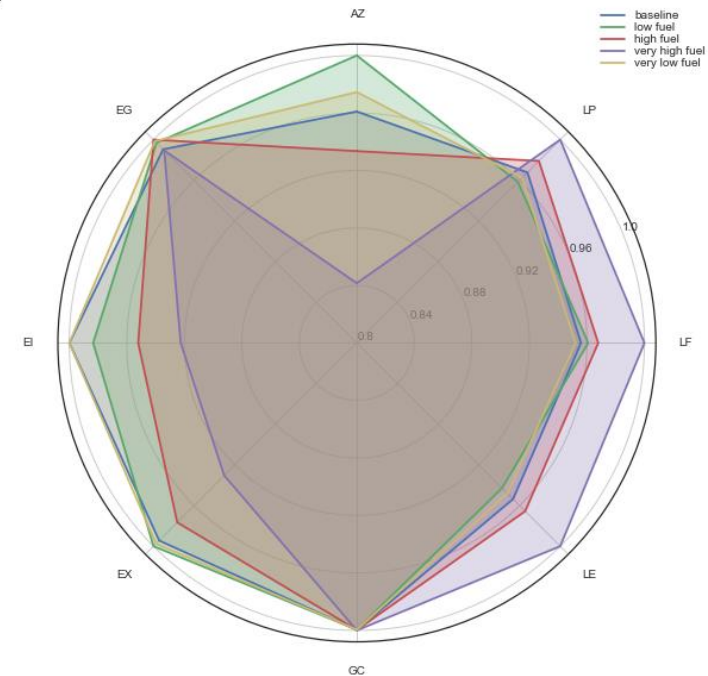

Tactical layers

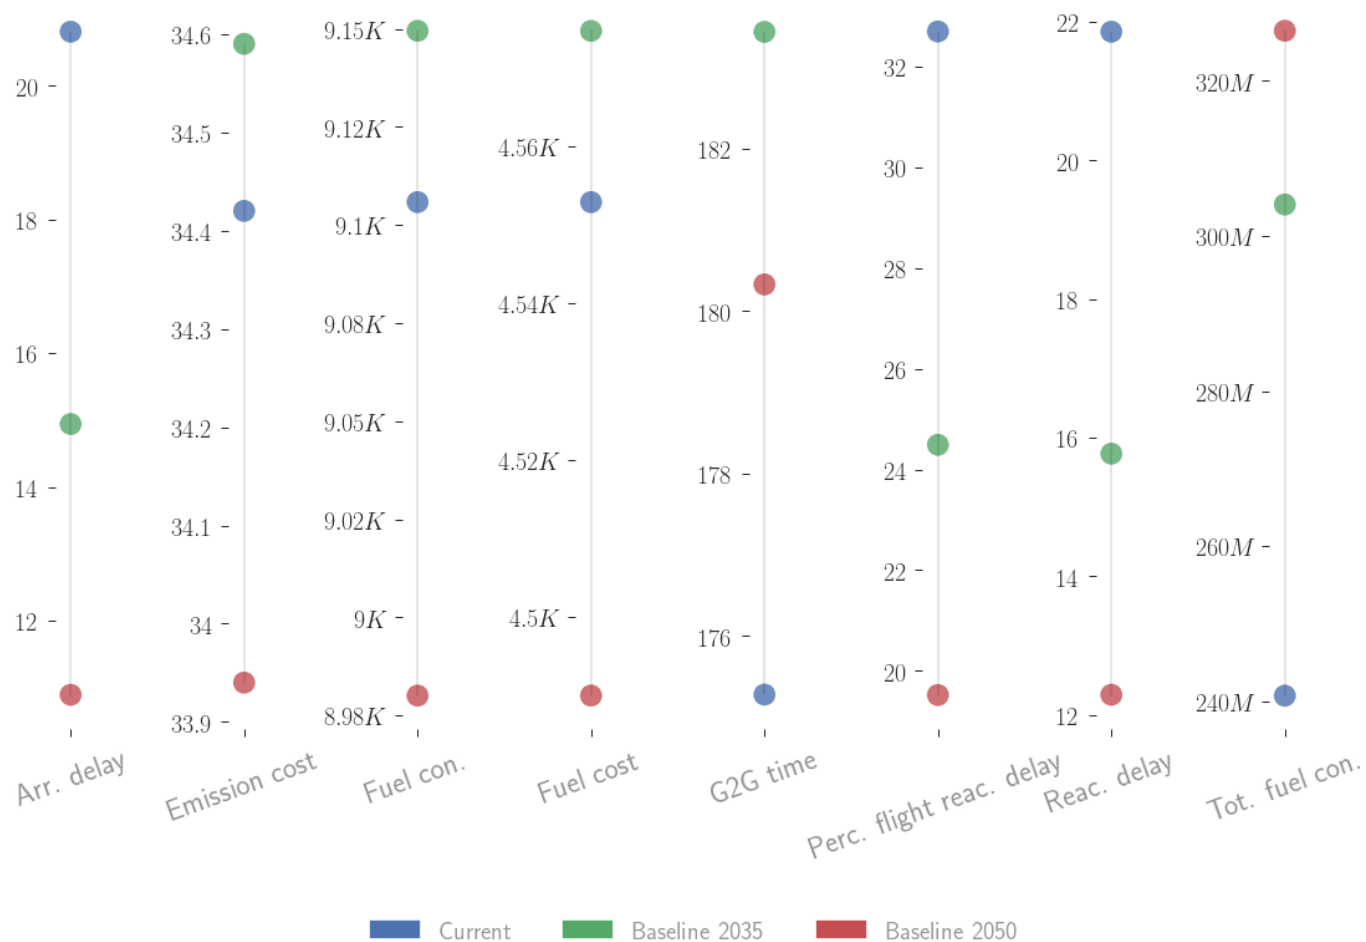

Key results: trade-offs?

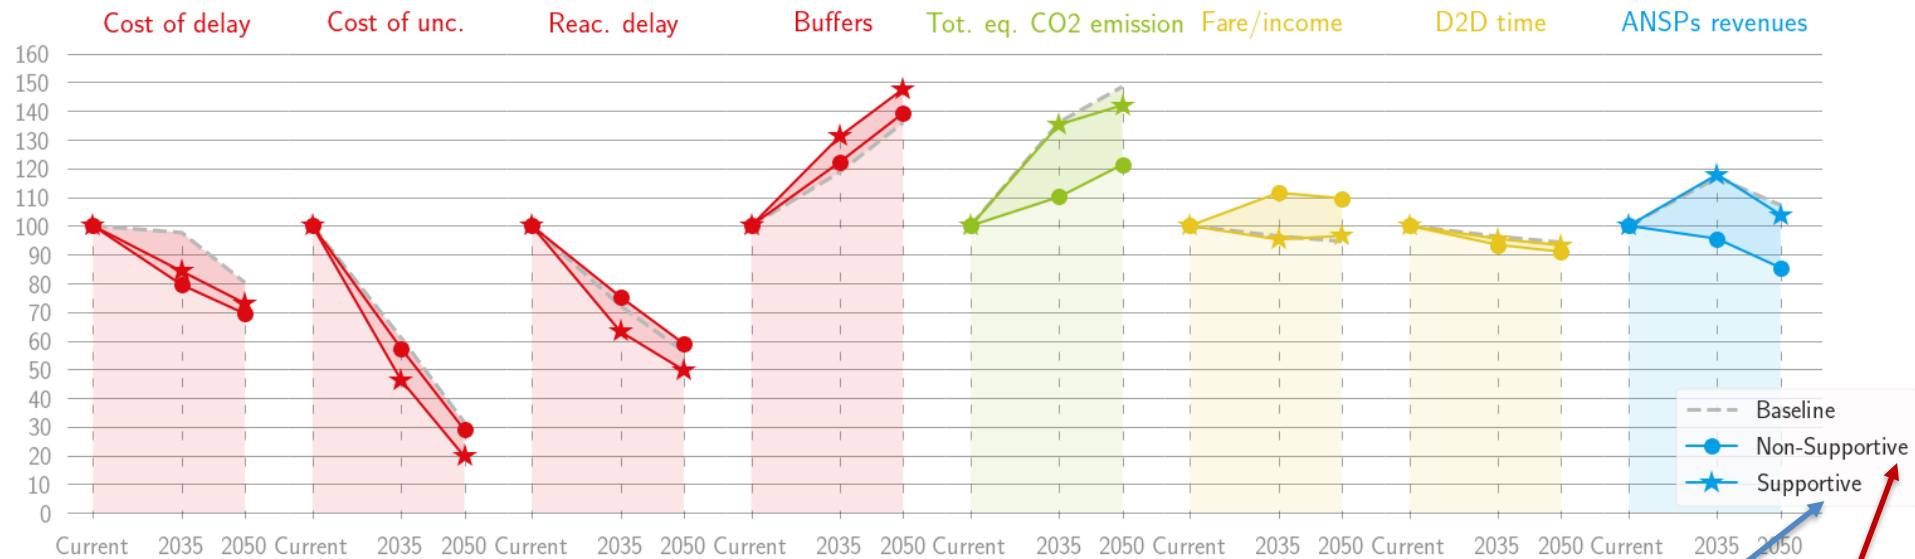

- Indicators can be aligned or go in different directions (trade-offs)
- Trade-offs between two given indicators can appear in some scenarios and disappear in others.

+ Low fuel price,
+ eco-tax,
+ better 4DT
+ pax protection

+ High fuel price
+ No eco tax

Conclusions

Model:

- **What-if** simulator taking into account high level socio-economic factors
- **Meso-micro simulator**, from economic feedback level, down to single passenger itineraries

Key results:

- Main high-level driver: **demand and price of fuel**
- Cost of emissions has an impact only if **NO_x is taken into account** and price of allowance is much higher
- The average size of the aircraft used by airlines is increasing
- Total emissions are expected to very substantially increase in the future
- The reduction of uncertainty in the departure time envisioned by SESAR is expected to have major impact on the cost of delay to the airlines

Conclusions

- Fuel consumption per flight is flat over time as the (e.g. technological) benefits obtained by the system are offset by the **use of longer routes with larger aircraft**
- There is an **increase in the size of the buffers** per flight: this may contribute to the **reductions in tactical delay costs**
- an improvement in passenger door-to-door times does not necessarily imply an increase in the average emissions per flight
- Reductions in flight arrival delay with passenger arrival delay map close to a 1:1.3 ratio



Vista project

Thanks for listening!



This project has received funding from the SESAR Joint Undertaking under the European Union's Horizon 2020 research and innovation programme under grant agreement No 699390.



Founding Members



The opinions expressed herein reflect the authors' view only.

Under no circumstances shall the SESAR Joint Undertaking be responsible for any use that may be made of the information contained herein.

Overview



Current

Overview



Low baseline 2035

Overview



Non-supportive 2035

Overview



Supportive 2035

- **ANSPs:** **capacity**, **delay**, expenses, maximum capacity, **revenues**, traffic, **unit rate**, spare capacity, slack capacity.
- **Pax:** airport delay, ATFM delay, **ticket price**, income, **fare to income ratio**, **frequency**, volume, **gate-to-gate time**, **door-to-door time**, number of missed connections, waiting times at airport.
- **Environment:** CO₂ emissions, NO_x estimation, environmental **impact in CO₂ equivalents**.


- **Airports:** **capacity**, **departure delay**, total costs, profit, revenues, traffic (for 24 hours), tactical arrival holding delay and departing queuing delay.
- **Airlines:** airport delay, ATFM delay, ATC cost, airport cost, **cost of delay** (strategic, tactical), emission costs, fuel cost, crew cost, maintenance cost, **cost of uncertainty**, cost of uncertainty per minute, **emissions** in CO₂ equivalents, ticket price, size of aircraft, **fuel consumption**, uncertainty, number of passengers, total operational cost, flight plan characteristics (length, time, profile, average wind), **load factor**, **buffers**, departing and arrival delay, gate-to-gate performance.

Project overview

Workflow:


- Build an extensive list of **business** and **regulatory** factors likely to impact the ATM system.
- **Classify the factors:** short-term/long-term, likelihood of occurrence, importance of their impact on the ATM system, etc.
- Build current and future **scenarios**.
- Building model requirements:
 - *consider as many (important) factors as possible in a flexible way;*
 - *produce level of detail required and achievable to capture relevant metrics.*
- **Iterative model development** in consultation with stakeholders.
- Trade-off analysis.

Pre-tactical metrics

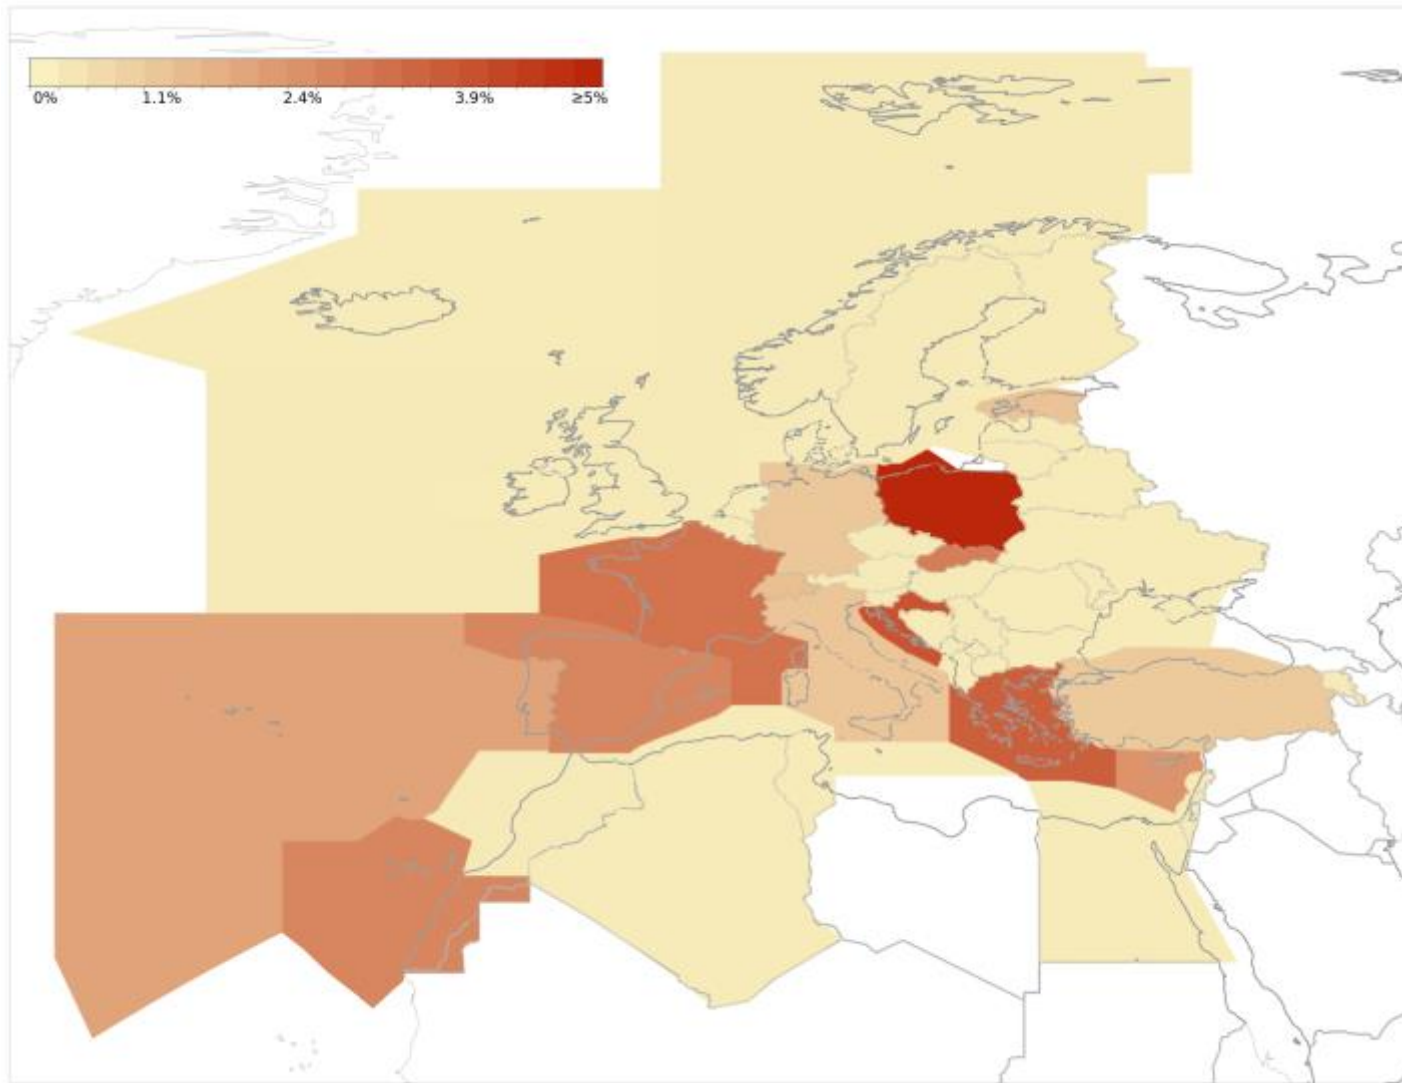


Current

Pre-tactical metrics

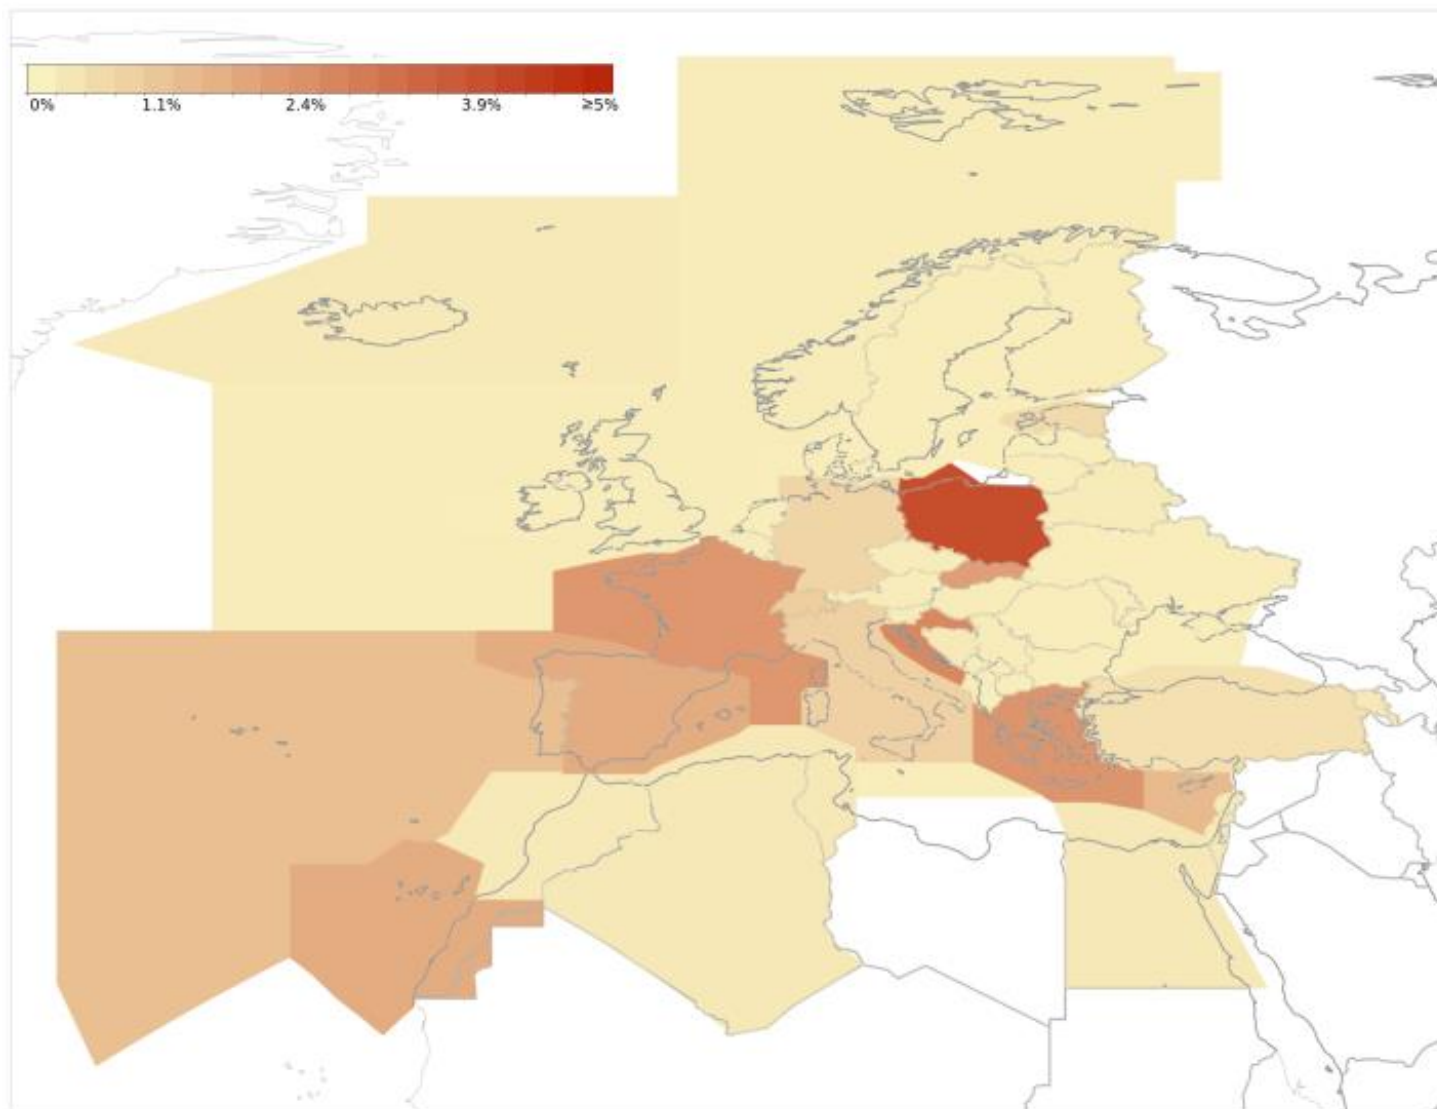


Low 2050


Goals and objectives

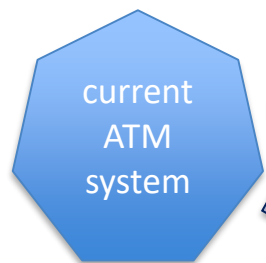


factor x = high
2035 factors




factor x = low
2035 factors

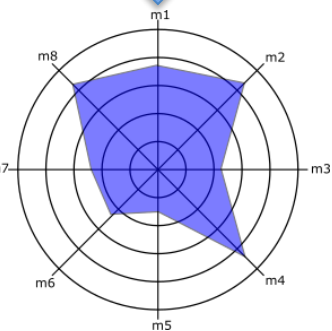




2035 factor x high system indicators

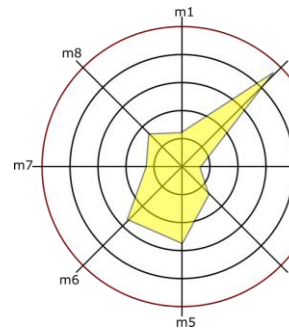


2035 factor x low system indicators

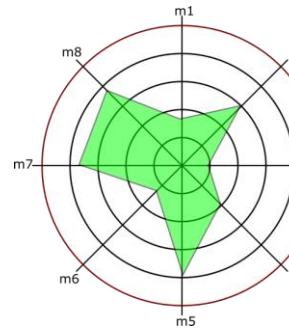

Trade-offs

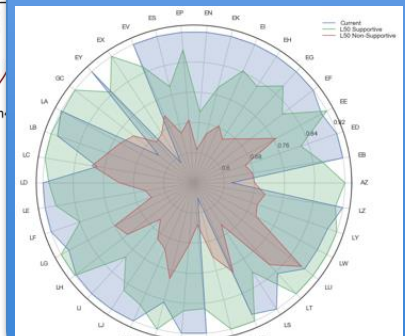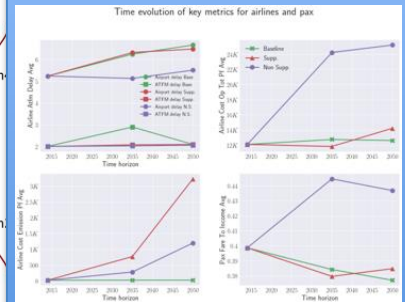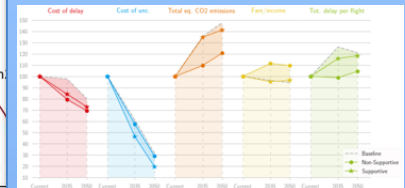

Scenario definition in Vista

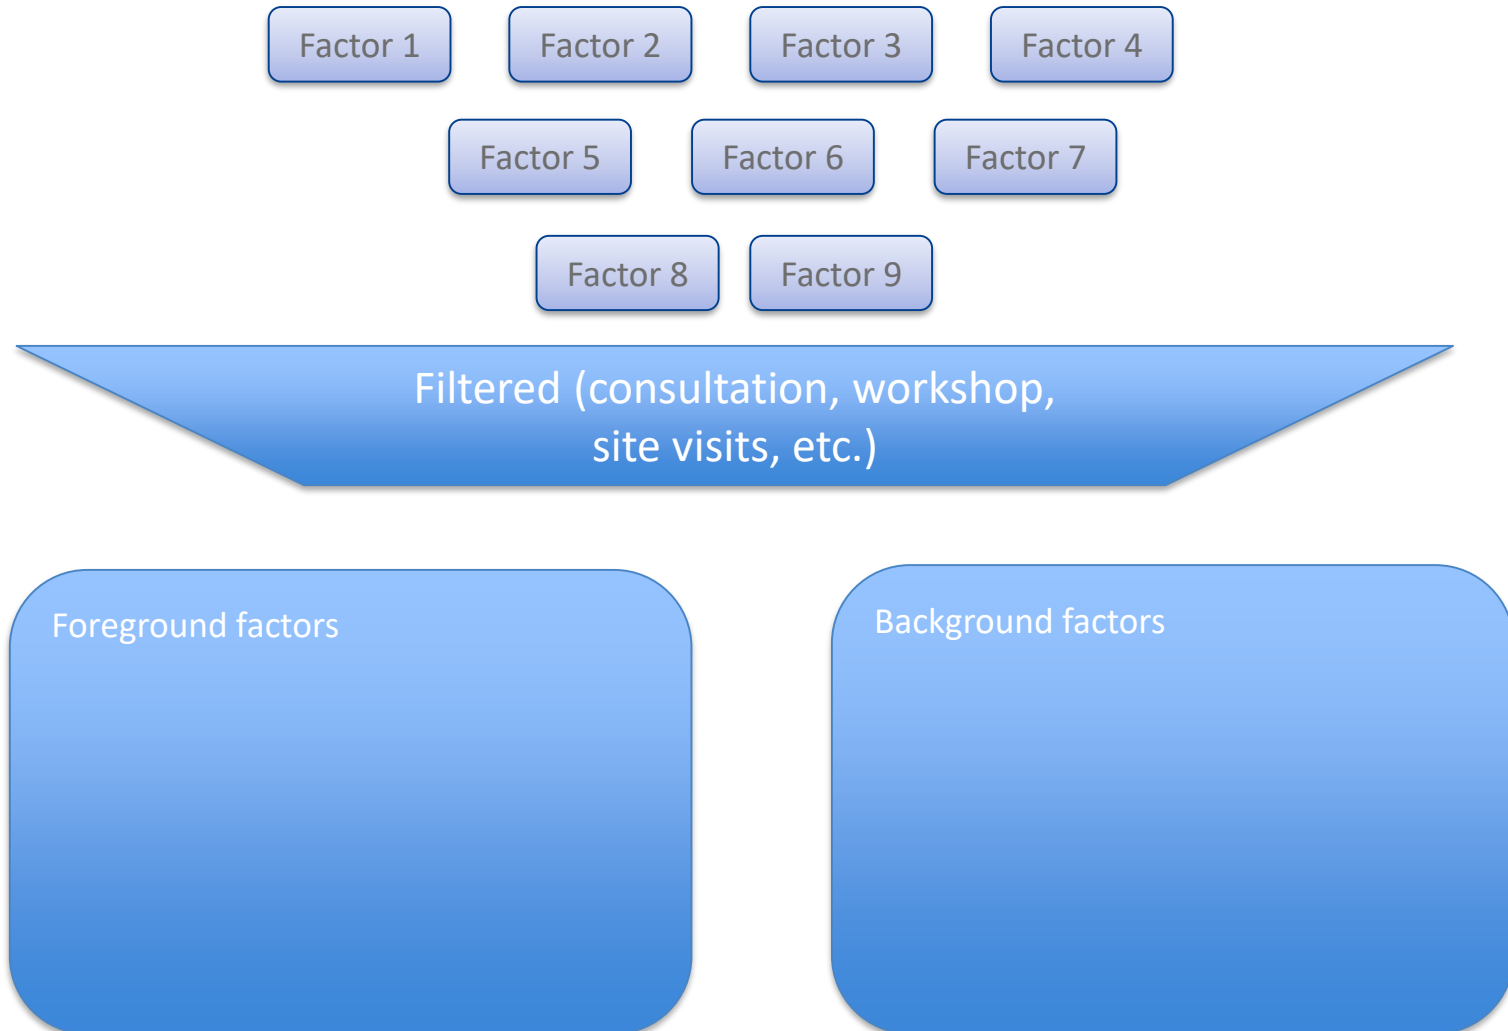


Pe-tactical layer – Pax itinerarie

Schedules

Fid	From	To	SOBT	SIBT	Capacity	...
F _{AD1}	A	D	9:00	10:30	120	
F _{AD2}	A	D	10:45	12:20	240	
F _{AD3}	A	D	10:50	12:20	120	
F _{CD1}	C	D	8:30	12:00	70	
...						


Passenger flows

Pax flow	Passengers	Route	...
PF _{AD}	800	A - D	
PF _{BCD}	35	B - C - D	
PF _{ED}	1230	E - D	
PF _{BCF}	560	B - C - F	
...			

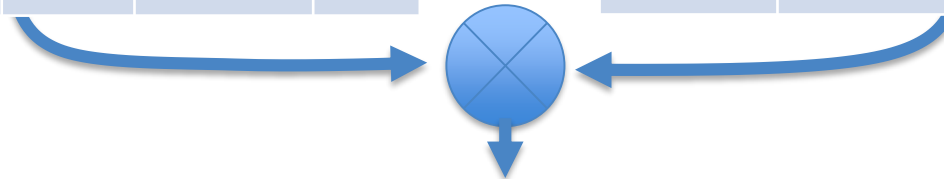


Pax	Flow	Fare	Flights	...
3	PF _{AD}	130	F _{AD1}	
2	PF _{AD}	240	F _{AD1}	
1	PF _{BCD}	145	F _{BC1} - F _{CD2}	
...				


Pe-tactical layer – ATFM regulations

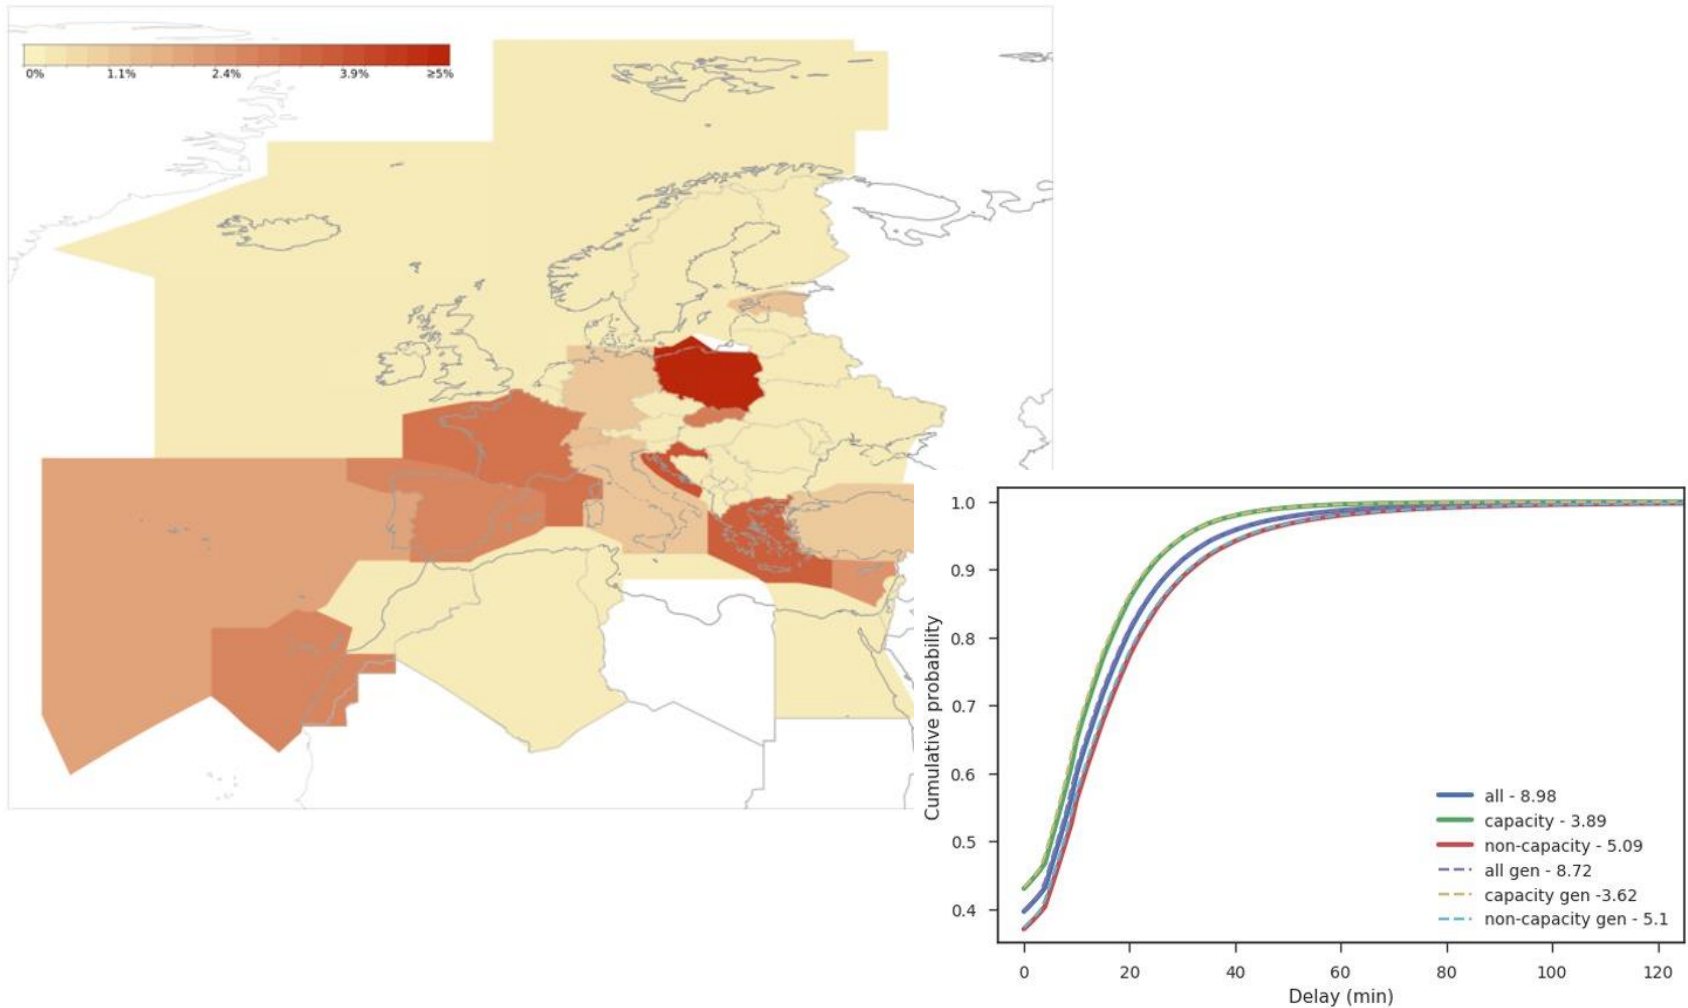


Pre-tactical metrics

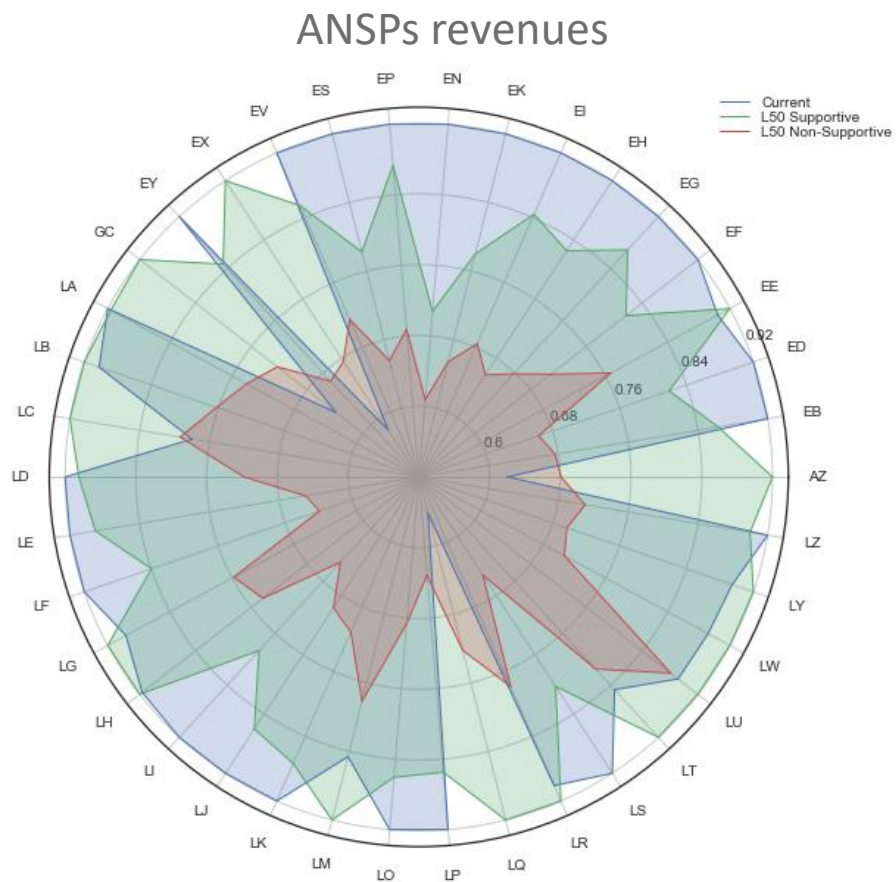


Pre-tactical metrics

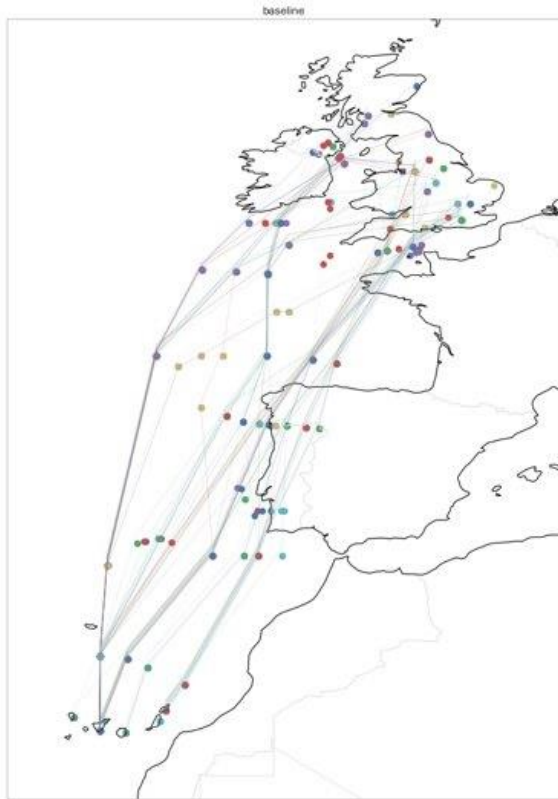


Demand variation

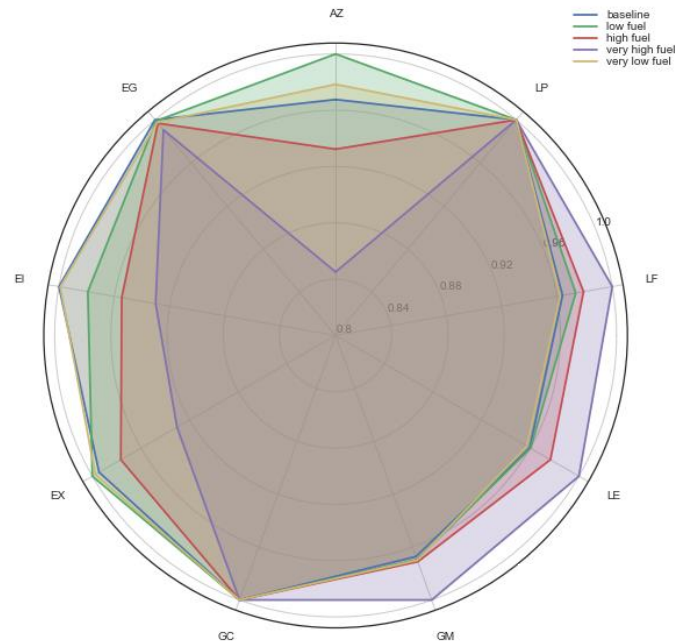

Revenue variation

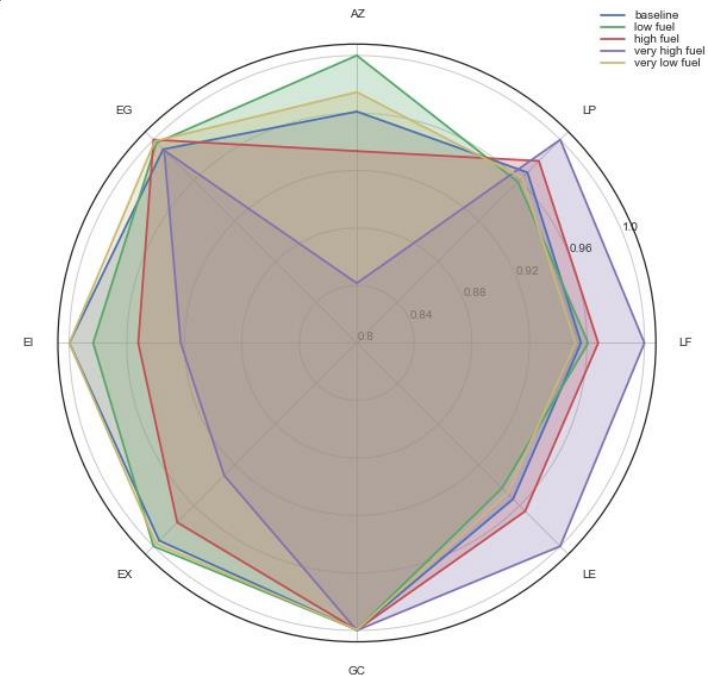


Strategic metrics

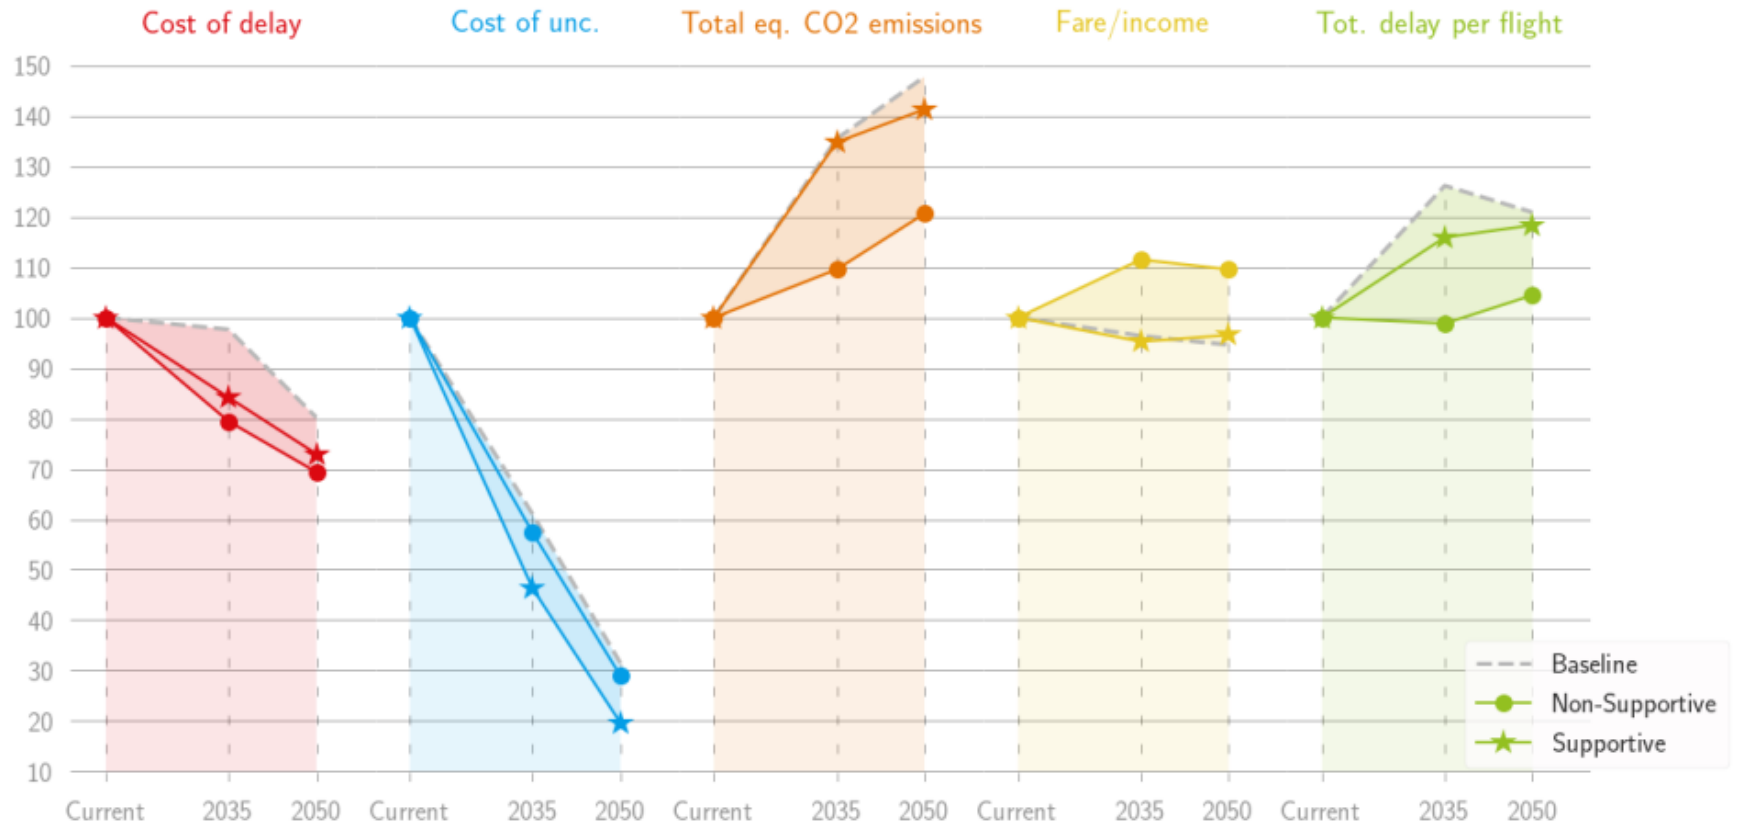

Pre-tactical metrics



Pre-tactical metrics

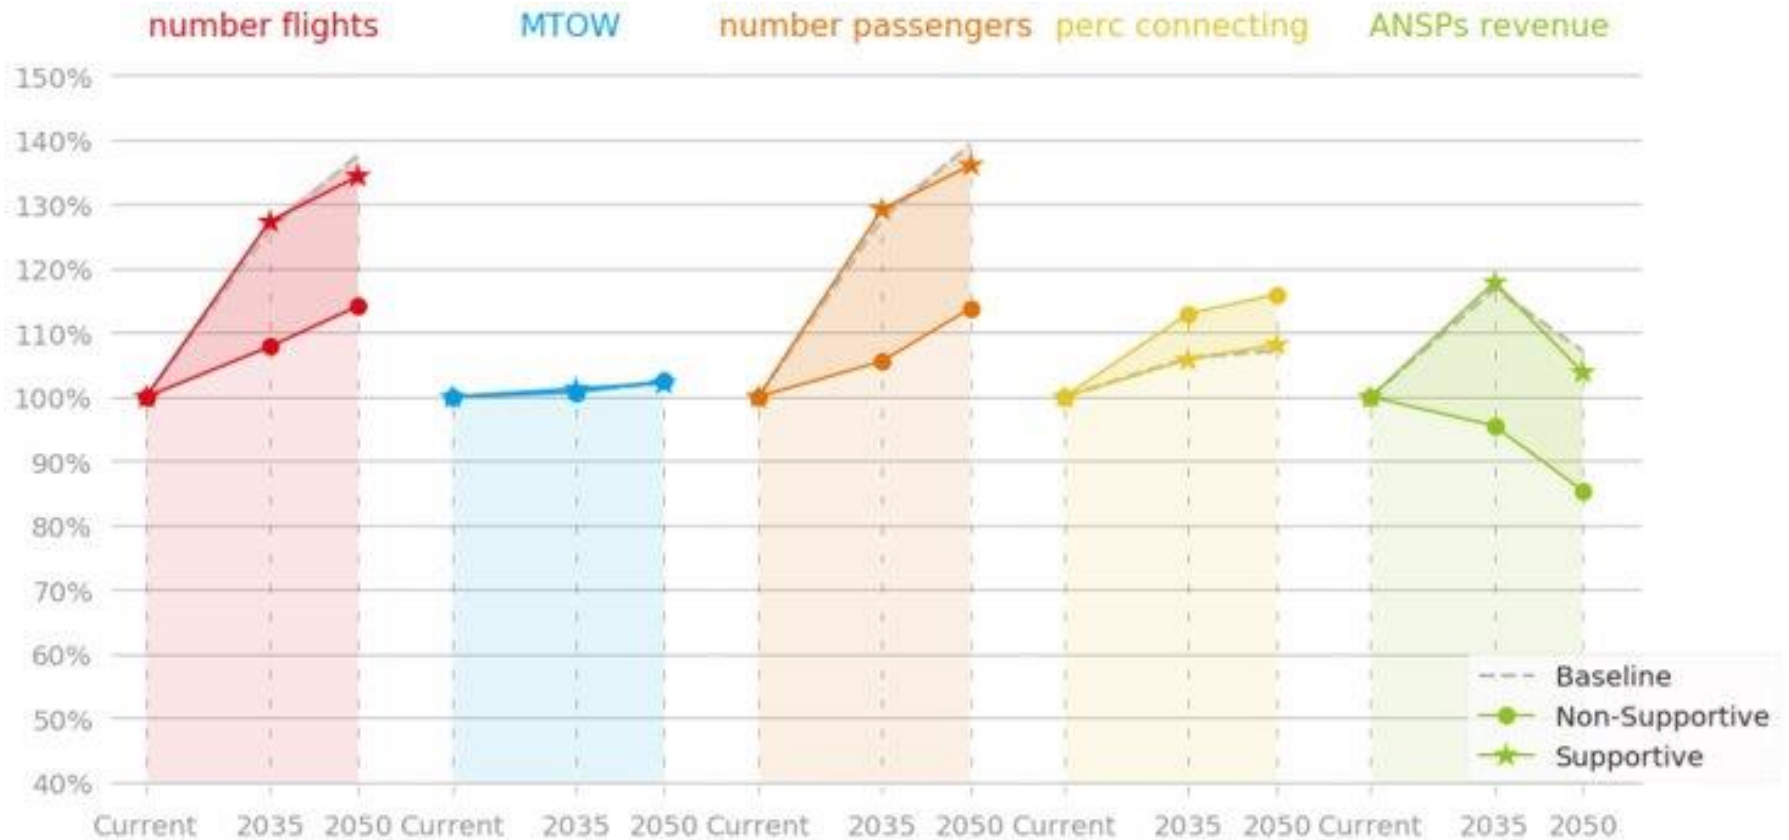

Buffer size vs flight plan distance

