



# European Route Network Improvement Plan/ERNIP Implementation Monitoring

Monitoring Report: AIRAC 2008  
16 July 2020 - 12 August 2020



**European Route Network  
Improvement Plan  
(ERNIP)  
Implementation Monitoring**

**Monitoring Report: AIRAC 2008  
16 July 2020 - 12 August 2020  
NETWORK MANAGER**

*Left blank intentionally*

## TABLE OF CONTENT

<b>TABLE OF CONTENT .....</b>	<b>4</b>
<b>1. INTRODUCTION.....</b>	<b>6</b>
1.1 SUMMARY .....	6
1.2 PERFORMANCE TARGETS - THIRD REFERENCE PERIOD/ RP3.....	6
1.3 A CONSOLIDATED EUROPEAN AIRSPACE DEVELOPMENT .....	8
1.4 MONITORING AND IMPROVEMENT .....	9
<b>2. LIST OF PROPOSALS IMPLEMENTED AIRAC 2008 (16 JULY 2020) .....</b>	<b>10</b>
2.1 SUMMARY OF MAJOR PROJECTS IMPLEMENTED ON 16 JULY 2020.....	10
<b>3. EVOLUTION OF PERFORMANCE INDICATORS.....</b>	<b>11</b>
3.1 AIRSPACE DESIGN INDICATOR EVOLUTION.....	11
3.2 FLIGHT PLANNING INDICATOR EVOLUTION .....	11
3.3 ROUTE AVAILABILITY INDICATOR EVOLUTION.....	11
3.4 FLIGHT EFFICIENCY EVOLUTION PER AIRAC CYCLE .....	12
3.4.1 EVOLUTION OF RTE-DES AND RTE-FPL INDICATORS.....	13
3.4.2 EVOLUTION OF RTE-RAD INDICATOR.....	13
3.4.3 BENEFITS AND ASSESSMENT OF RTE-DES AND RTE-FPL EVOLUTIONS .....	13
3.4.4 BENEFITS AND ASSESSMENT OF RTE-RAD EVOLUTIONS .....	18
3.5 FREE ROUTE AIRSPACE/ FRA EVOLUTION.....	18
3.6 ASM PERFORMANCE ASSESSMENT.....	19
<b>ANNEX A: DETAILED LIST OF PROJECTS IMPLEMENTED 16 JULY 2020 .....</b>	<b>20</b>
<b>ANNEX B: ACRONYMS AND TERMINOLOGY .....</b>	<b>23</b>

*Left blank intentionally*

## 1. INTRODUCTION

### 1.1 SUMMARY

This Monitoring Report focuses on **AIRAC 2008 (16 July 2020 - 12 August 2020)**. It provides an update on the evolution of the environment indicators<sup>1</sup> listed in the *Network Performance Plan* and plots on the progress achieved in improving airspace design and its utilisation flight efficiency<sup>2</sup>, in line with the improvement proposals implemented in the relevant AIRAC cycle.

Despite of no airspace enhancements implemented during AIRAC 2008 but influenced by the airspace design improvements put in place since AIRAC 1908 in connection with changing traffic patterns and structure, the additional, **potential savings offered** during AIRAC cycle 2008 amount to 400 000 NMs flown less compared with the equivalent AIRAC cycle in 2019. This translates into 2 400 tons of fuel, or 8 000 tons of CO<sub>2</sub>, or € 2 000 000.

Based on the last filed flight plan indicator and as a result of the airspace design improvements put in place since AIRAC 1908 in connection with changing traffic patterns and the airline choices made, the **actual gains calculated** during the AIRAC cycle 2008 amount to 1 728 000 NMs flown less compared to the equivalent AIRAC cycle in 2019. This translates into 10 368 tons of fuel, or 34 560 tons of CO<sub>2</sub>, or € 8 640 000.

The actual savings recorded on the last filed flight plan data during AIRAC cycle 2008 compared to the equivalent AIRAC cycle in 2019 are a result of airspace design improvement measures and traffic composition in connection with the varying flight planning choices of the airline operators. The airline choices are **affected by special events** like weather, industrial actions, closed areas in adjacent airspace(s) and regulations applied due to capacity problems in the network.

*Note: The data of AIRAC 2008 report are significantly disrupted by the COVID-19 crisis. Traffic continues to progress between 40%~50% of last year's levels, still around 50% - 60% fewer flights in the NM area compared to 2019. Therefore, the statistics/ results might not be as reliable and accurate as usual.*

The periodical implementation process is part of the ERNIP Part 2 - ARN Version 2020 - 2024 to enhance the European ATM capacity, flight efficiency and environmental performance through the development and implementation of an improved ATS route network, Free Route Airspace and TMA systems structures supported by corresponding improvements to the airspace structure and the optimal utilisation rules.

### 1.2 PERFORMANCE TARGETS - THIRD REFERENCE PERIOD/ RP3

The ERNIP Part 2 - ARN Version 2020 - 2024 will contribute to the achievement of the performance targets of the third Reference Period of the Single European Sky Performance Scheme/ RP3. For the third performance Reference Period/ RP3 starting on 1<sup>st</sup> January 2020 and ending on 31<sup>st</sup> December 2024, the European Union-wide performance indicators will be as follows:

#### **Environment**

- average horizontal en-route flight efficiency of the actual trajectory, calculated as follows:
  - the indicator is the comparison between the length of the en route part of the actual trajectory derived from surveillance data and the achieved distance, summed over IFR flights within or traversing the airspace as defined in Article 1, hereinafter referred to as 'European airspace';

---

<sup>1</sup> **FPL:** Flight Plan data provided by NM systems; SAAM analysis carried out by NM. **DES/ RAD** Traffic demand provided by NM systems; airspace environment data, profile calculations and SAAM analysis provided by NM.

<sup>2</sup> The methodology used for assessing flight efficiency is described in WP/9 of RNDSG/64. This document can be found at: <https://ost.eurocontrol.int/sites/RNDSG/Shared%20Documents/Forms/AllItems.aspx?RootFolder=%2Fsites%2FRNDSG%2FShared%20Documents%2F%21%21%21%20RNDSG%20Meetings%2FRNDSG%20meetings%2051%2D85%2FRNDSG%2D64%20%2820%2D22%20May2008%29>

- 'en route part' refers to the distance flown outside a circle of 40 NM around the airports;
- where a flight departs from or arrives at an airport outside the European airspace, the entry or exit points of the European airspace are used for the calculation of this indicator as the origin or destination respectively, rather than the departure or destination airport;
- where a flight departs from and arrives at an airport inside the European airspace and crosses a non-European airspace, only the part inside the European airspace is used for the calculation of this indicator;
- 'achieved distance' is a function of the position of the entry and exit points of the flight into and out of each portion of airspace for all parts of the trajectory. Achieved distance represents the contribution that those points make to the great circle distance between origin and destination of the flight; and,
- the indicator is calculated for the whole calendar year and for each year of the reference period, as an average. When calculating this average, the ten highest daily values and the ten lowest daily values are excluded from the calculation.

**This KPI is applicable at both network and Functional Airspace Block level.**

The Regulation also introduces a new environmental indicator for monitoring:

- the share of arrivals applying Continuous Descent Operation/ CDO, calculated at local level as follows:
  - this indicator is the ratio between the total number of arrivals performing a CDO from a reference point at a height above ground, defined by the national supervisory authority, and the total number of arrival operations; and,
  - this indicator is expressed as a percentage, calculated for the whole calendar year and for each year of the reference period.

**This indicator is applicable at local level.**

It should be noted that this indicator might be used to measure the performance of the part of the descent profile where noise is the principal environmental impact. Whilst the altitude of the reference point to be defined by the national supervisory authority may depend upon local factors such as airspace particularities or the extent of the area of responsibility, the majority of emissions savings can be gained from enabling CDO from top of descent or from higher levels wherever possible. Whilst reference points may be defined according to local requirements, airspace design should still aim to enable CDO from top of descent or from as high a level as possible.

**Capacity:**

- The average minutes of en route ATFM delay per flight attributable to air navigation services, calculated as follows:
  - the en route ATFM delay is the delay calculated by the Network Manager, expressed as the difference between the estimated take-off time and the calculated take-off time allocated by the Network Manager;
  - for the purposes of this indicator:
    - 'estimated take-off time' means the forecast of time when the aircraft will become airborne calculated by the Network Manager and based on the last estimated off-block time, or target off-block time for those airports covered by airport collaborative decision-making procedures, plus the estimated taxi-out time calculated by the Network Manager;
    - 'calculated take-off time' means the time allocated by the Network Manager on the day of operation, as a result of tactical slot allocation, at which a flight is expected to become airborne;

- 'estimated taxi-out time' means the estimated time between off-block and take off. This estimate includes any delay buffer time at the holding point or remote de-icing prior to take off;
- this indicator covers all IFR flights and all ATFM delay causes, excluding exceptional events; and,
- this indicator is calculated for the whole calendar year and for each year of the reference period.

The ERNIP Part 2 - ARN Version 2020 - 2024 also responds to the targets included in the Network Performance Plan (NPP) 2020 - 2024 as described below:

- Route extension - last filed flight plan:
  - Targets:
    - Achieve 3.78% for NM area for KPI by 2024.
- Percentage of En-route delay savings:
  - Targets:
    - Deliver additional operational benefits in terms of en-route delay savings of 10% of total en-route delay.

### **1.3 A CONSOLIDATED EUROPEAN AIRSPACE DEVELOPMENT**

The ERNIP Part 2 - ARN Version 2020 - 2024 will, in cooperation with the ANSPs and the FABs, ensure the implementation of the Airspace Vision agreed by the Network Management Board:

- a comprehensive cross-border implementation of Free Route Airspace, at least at and above FL310, in the European airspace;
- an optimised route structure below Free Route Airspace/ FRA ensuring efficient connectivity in/out terminal airspace;
- a simplification of the RAD;
- a harmonisation of the airspace publications;
- more efficient Flexible Use of Airspace procedures and the associated system support to enable a better utilisation of the civil/military airspace structures;
- a closer cooperation between the Network Manager, the airspace users and the computer flight plan service providers aimed at ensuring a better utilisation of the available airspace structures.

The ERNIP Part 2 - ARN Version 2020 - 2024:

- achieves an European Route Network for the safe and efficient operation of air traffic, taking due account of the environmental impact;
- keeps operational consistency of the European airspace organisation;
- consolidates into a network approach the Functional Airspace Blocks developments, the wide implementation of airspace projects from Free Route Airspace to TMA developments;
- facilitates the development of an airspace structure offering the required level of safety, capacity, flexibility, responsiveness, environmental performance and seamless provision of expeditious air navigation services, with due regard to security and defence needs;
- ensures regional interconnectivity and interoperability of the European route network within the ICAO EUR Region and with adjacent ICAO Regions.
- ensures compliance with the Commission Implementing Regulation No 716/2014 of 27<sup>th</sup> June 2014 on the establishment of the Pilot Common Project supporting the implementation of the European Air Traffic Management Master Plan.

The ERNIP Part 2 - ARN Version 2020 - 2024 includes details on:

- Implementation of Free Route Airspace projects;
- ATS route network developments;
- Re-sectorisation actions;
- Actions aimed at simplifying the usage of the ATS route network;



- Civil/military airspace structures;
- Deployment of the night route network.

The ERNIP Part 2 - ARN Version 2020 - 2024 is derived from the following sources:

- Proposals covering a cohesive development of the European Airspace Structure;
- Solutions developed inside various FAB initiatives;
- Proposals originating at national or sub-regional level;
- Aircraft operator's proposals.

## 1.4 MONITORING AND IMPROVEMENT

Through the European Route Network Improvement Plan/ ERNIP Part 2, the Network Manager supports the Commission by providing relevant input for the preparation of Union-wide performance targets before the reference periods and for **monitoring the achievement of the performance targets during the reference period**.

In that respect, a close cooperation and synchronisation was ensured between the Network Manager and all the FABs in the preparation of the ERNIP Part 2 - ARN Version 2020 - 2024, as part of the Network Operations Plan.

The Monitoring Report - as part of the ERNIP Part 2 - ARN Version 2020 - 2024 - addresses the **monitoring and improvement of the environment/ flight efficiency performance** of the network from an airspace design and utilisation perspective as one of the requirements laid down in the COMMISSION IMPLEMENTING REGULATIONS.

The **ERNIP Implementation Monitoring Report** is published every Aeronautical Information Regulation And Control (AIRAC) cycle and available via the EUROCONTROL *Airspace design and utilisation website* (publication/ activity):

<https://www.eurocontrol.int/publication/european-route-network-improvement-plan-ernip-monitoring-report-airac-2008>

The list of all available monitoring reports is accessible via the EUROCONTROL *Route network and airspace design* website (function):

<https://www.eurocontrol.int/function/route-network-and-airspace-design>

A copy of the ERNIP Implementation Monitoring Report is available via the restricted EUROCONTROL OneSky Online websites for access by interested members of the RND SG, ASMSG and NETOPS (see sub-sections under main section "LIBRARY"):

<https://ost.eurocontrol.int/sites/NETOPS/SitePages/Home.aspx>

<https://ost.eurocontrol.int/sites/RND SG/SitePages/Home.aspx>

<https://ost.eurocontrol.int/sites/ASM-SG/SitePages/Home.aspx>

## **2. LIST OF PROPOSALS IMPLEMENTED AIRAC 2008 (16 JULY 2020)**

### **2.1 SUMMARY OF MAJOR PROJECTS IMPLEMENTED ON 16 JULY 2020**

During the AIRAC cycle no airspace improvement packages co-ordinated at network level were implemented.

NONE

<p>The latest situation of the European route network structure is available and updated at each AIRAC cycle through the publication of Regional Electronic Charts that can be found here: <a href="http://www.eurocontrol.int/articles/eurocontrol-regional-charts">http://www.eurocontrol.int/articles/eurocontrol-regional-charts</a></p>
--

### 3. EVOLUTION OF PERFORMANCE INDICATORS

#### 3.1 AIRSPACE DESIGN INDICATOR EVOLUTION

The graph below shows the yearly evolution of airspace design flight efficiency (RTE-DES<sup>3</sup>) over the period 2007 - 2019 and its evolution until 12 August 2020. *(Note: inclusion of new measurements will be done as soon as all data will become available)*

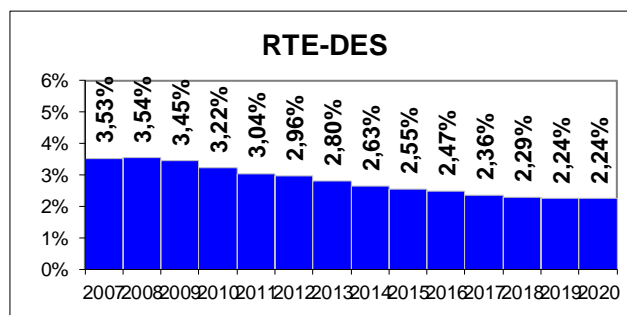


Figure 1 : Airspace Design indicator evolution

#### 3.2 FLIGHT PLANNING INDICATOR EVOLUTION

The graph below shows the yearly evolution of the last filed flight plan indicator (RTE-FPL<sup>4</sup>) over the period 2007 - 2019 and its evolution until 12 August 2020. *(Note: inclusion of new measurements will be done as soon as all data will become available)*

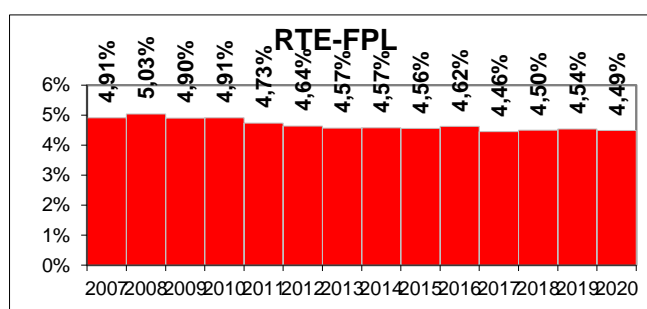


Figure 2 : Airspace Design indicator evolution

#### 3.3 ROUTE AVAILABILITY INDICATOR EVOLUTION

The impact of the civil route restrictions included in the Route Availability Document (RAD) is measured through a specific RAD indicator (RTE-RAD<sup>5</sup>). The graph below shows the yearly evolution of the RTE-RAD indicator between January 2012 and 12 August 2020. *(Note: inclusion of new measurements will be done as soon as all data will become available)*

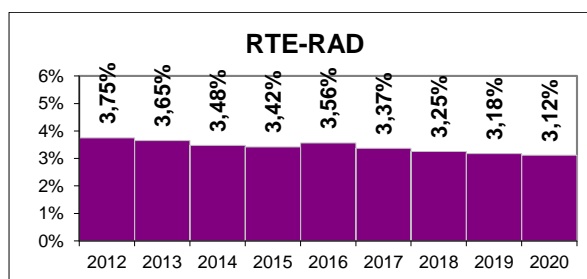


Figure 3 : Route Availability indicator evolution


<sup>3</sup> **RTE-DES** (Flight Extension due to Route Network Design) This KPI will be calculated by measuring the difference between the shortest route length (from TMA exit and entry points) and the great circle distance. For this KPI the RAD will not be taken into account and all the CDR routes will be considered as open.

<sup>4</sup> **RTE-FPL** (Flight Extension due to Route Network Utilisation - last filled FPL) This KPI will be calculated by measuring the difference between the route from the last filed flight plan for each flight (from TMA exit and entry points) and the great circle distance.

<sup>5</sup> **RTE-RAD**: (Flight Extension due to Route Network Utilisation - RAD active) This KPI will be calculated by measuring the difference between the shortest plannable route length (from TMA exit and entry points) and the great circle distance. For this KPI the RAD will be taken into account and all the CDR routes will be considered as open.


### 3.4 FLIGHT EFFICIENCY EVOLUTION PER AIRAC CYCLE

The graph below shows the evolution per AIRAC cycle of the two main flight efficiency indicators RTE-DES and RTE-FPL over the period 2010 - 2019 and the evolution until 12 August 2020. (Note: inclusion of new measurements will be done as soon as all data will become available)

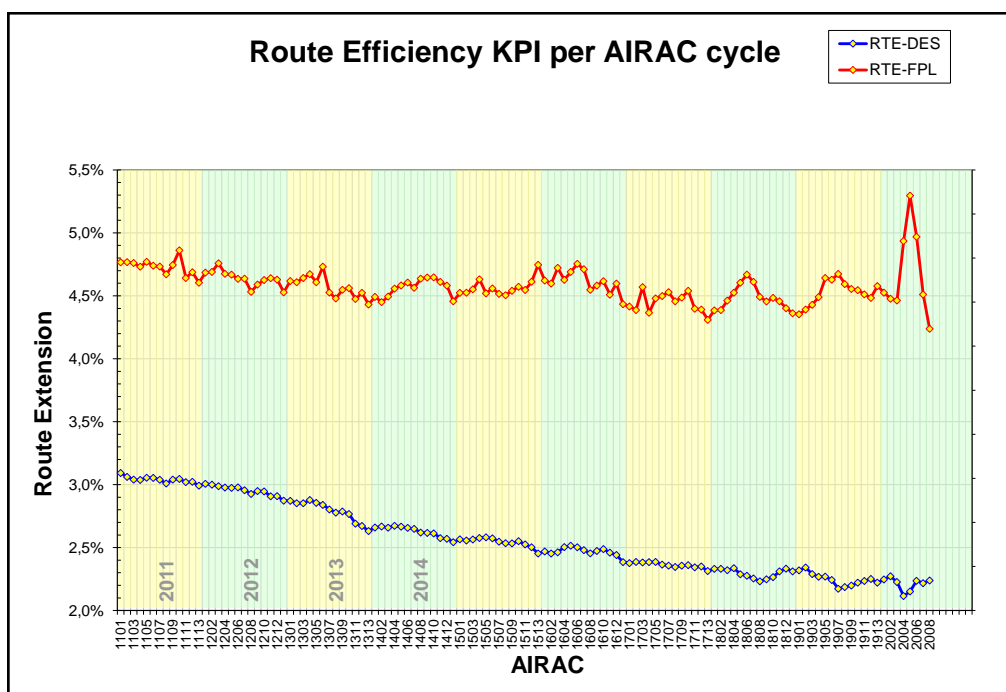

**Figure 4 :** Flight efficiency (DES, FPL) evolution per AIRAC cycle

The graph below shows the evolution per AIRAC cycle of the two main efficiency indicators RTE-DES and RTE-FPL in relation to the RTE-RAD indicator between January 2012 and 12 August 2020. (Note: inclusion of new measurements will be done as soon as all data will become available)

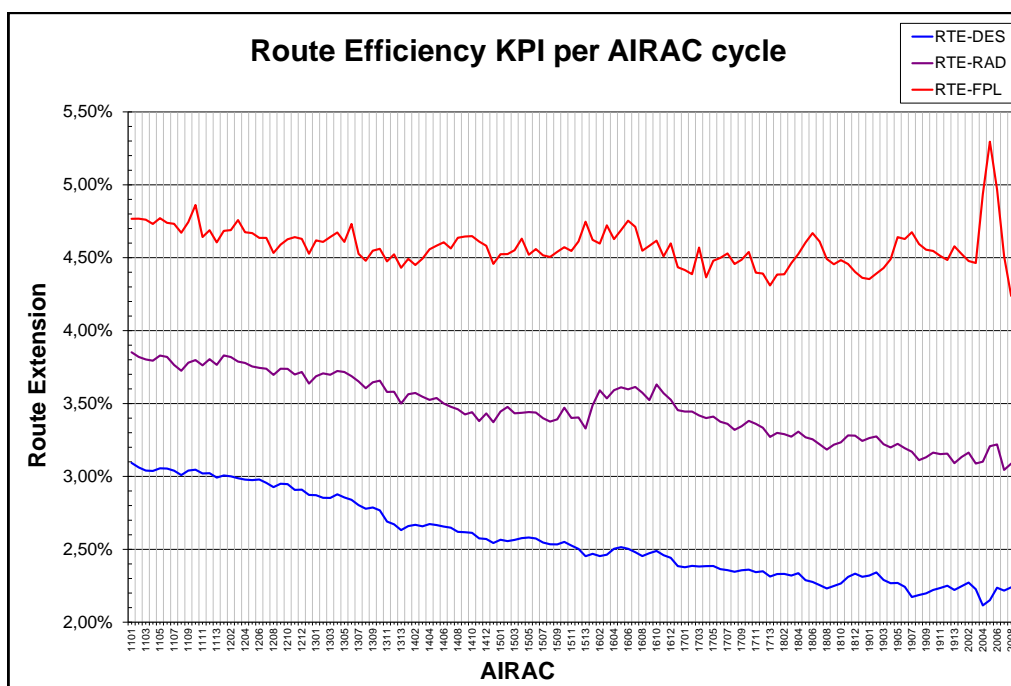

**Figure 5 :** Flight efficiency (DES, RAD, FPL) evolution per AIRAC cycle

**The difference between the three indicators (DES, FPL, RAD) clearly indicate that additional efforts must be made to further improve the efficiency of airspace utilisation and to ensure that the indicator based on the latest filed flight plan/ FPL and the RAD indicator follow similar to the airspace design indicator/ DES.**

### 3.4.1 EVOLUTION OF RTE-DES AND RTE-FPL INDICATORS

The current data indicates that, the average yearly route extension due to airspace design was reduced between 2009 and 12 August 2020 by 1.21 percentage points (same in AIRAC 2007). The evolution of the airspace design indicator is on the right path and the contributions of the airspace design projects are key for improving flight efficiency.

The current data indicates that, the average yearly route extension based on the last filed flight plan was reduced between 2009 and 12 August 2020 by 0.41 percentage points (0.36 in AIRAC 2007).

The difference between the airspace design indicator and the last filed flight plan indicator was 1.45 percentage points in 2009 and was 2.25 percentage points in August 2020 (2.30 in AIRAC 2007).

The current data indicates that the route extension due to airspace design went up to 2.24% in August 2020 (2.22 in AIRAC 2007).

The current data show that the route extension based on the last filed flight plan went down to 4.24% in August 2020 (4.51 in AIRAC 2007).

### 3.4.2 EVOLUTION OF RTE-RAD INDICATOR

As shown in Figure 3 above the impact of the RAD decreased by 0.63 percentage points in August 2020 compared with 2012. Continuous actions will be required further diminishing this impact and ensuring that the target set in the Network Manager Performance Plan is reached.

***Note:** During the COVID-19 crisis, over 1000 RAD restrictions have been suspended until 5<sup>th</sup> November. The RAD measures addressed offer additional flight planning options and - depending on daily traffic & airline choices made - generate a significant amount of distance-flown savings. It is subject to each ANSP to un-suspend these temporary modifications to national and cross-border restrictions. Currently, all Summer measures are suspended until next year. NM will continuously monitor the situation in relation to the COVID-19 evolution and adapt the actions accordingly. For more details see: <https://www.nm.eurocontrol.int/RAD/index.html/common/covid19.html>*

### 3.4.3 BENEFITS AND ASSESSMENT OF RTE-DES AND RTE-FPL EVOLUTIONS

Despite of no airspace enhancements implemented during AIRAC 2008 but influenced by the airspace design improvements put in place since AIRAC 1908 in connection with changing traffic patterns and structure, the additional, **potential savings offered** during AIRAC cycle 2008 amount to 400 000 NMs flown less compared with the equivalent AIRAC cycle in 2019. This translates into 2 400 tons of fuel, or 8 000 tons of CO<sub>2</sub>, or € 2 000 000.

Based on the last filed flight plan indicator and as a result of the airspace design improvements put in place since AIRAC 1908 in connection with changing traffic patterns and the airline choices made, the **actual gains calculated** during the AIRAC cycle 2008 amount to 1 728 000 NMs flown less compared to the equivalent AIRAC cycle in 2019. This translates into 10 368 tons of fuel, or 34 560 tons of CO<sub>2</sub>, or € 8 640 000.


The actual savings recorded on the last filed flight plan data during AIRAC cycle 2008 compared to the equivalent AIRAC cycle in 2019 are a result of airspace design improvement measures and traffic composition in connection with the varying flight planning choices of the airline operators. The airline choices are **affected by special events** like weather, industrial actions, closed areas in adjacent airspace(s) and regulations applied due to capacity problems in the network.

***Note:** The data of AIRAC 2008 report are significantly disrupted by the COVID-19 crisis. Traffic continues to progress between 40%~50% of last year's levels, still around 50% - 60% fewer flights in the NM area compared to 2019. Therefore, the statistics/ results might not be as reliable and accurate as usual.*

The special events recorded for this AIRAC cycle are as follows:

- **Overall crisis situation in Ukraine** that lead a significant number of flights to avoid the entire Ukrainian airspace moving to neighbouring countries (Turkey, Bulgaria, Romania, Poland, Slovakia, etc.); as a result of the Ukrainian crisis adjacent ACCs/ UACs were on-loaded by Far Eastern traffic avoiding the Ukraine airspace leading to increased route extensions.
- **Closure of Libyan airspace** for over flights due to the security situation required procedures with impact on flight efficiency for traffic between Europe and Africa re-routed via Egypt and Tunisia (while traffic to/from Tunisia remains suppressed since the terrorist attack on 26 June 2016.)
- **Avoidance of Syrian airspace** due to the security situation with impact on flight efficiency for traffic between Europe and Middle East and Asia re-routed via Iran and Turkey with additional impacts on the flows from the Ukrainian crisis.
- Aircraft Operators adjusted their schedules in reaction to the **Coronavirus (nCoV-2019)** and in reaction to State-implemented travel restrictions, resulting in a **significant decrease of flights** (70% fewer flights compared to 2019) operated in the NM area.


Figure 6 below shows the airspace unavailability and closed areas in July/ August 2020.

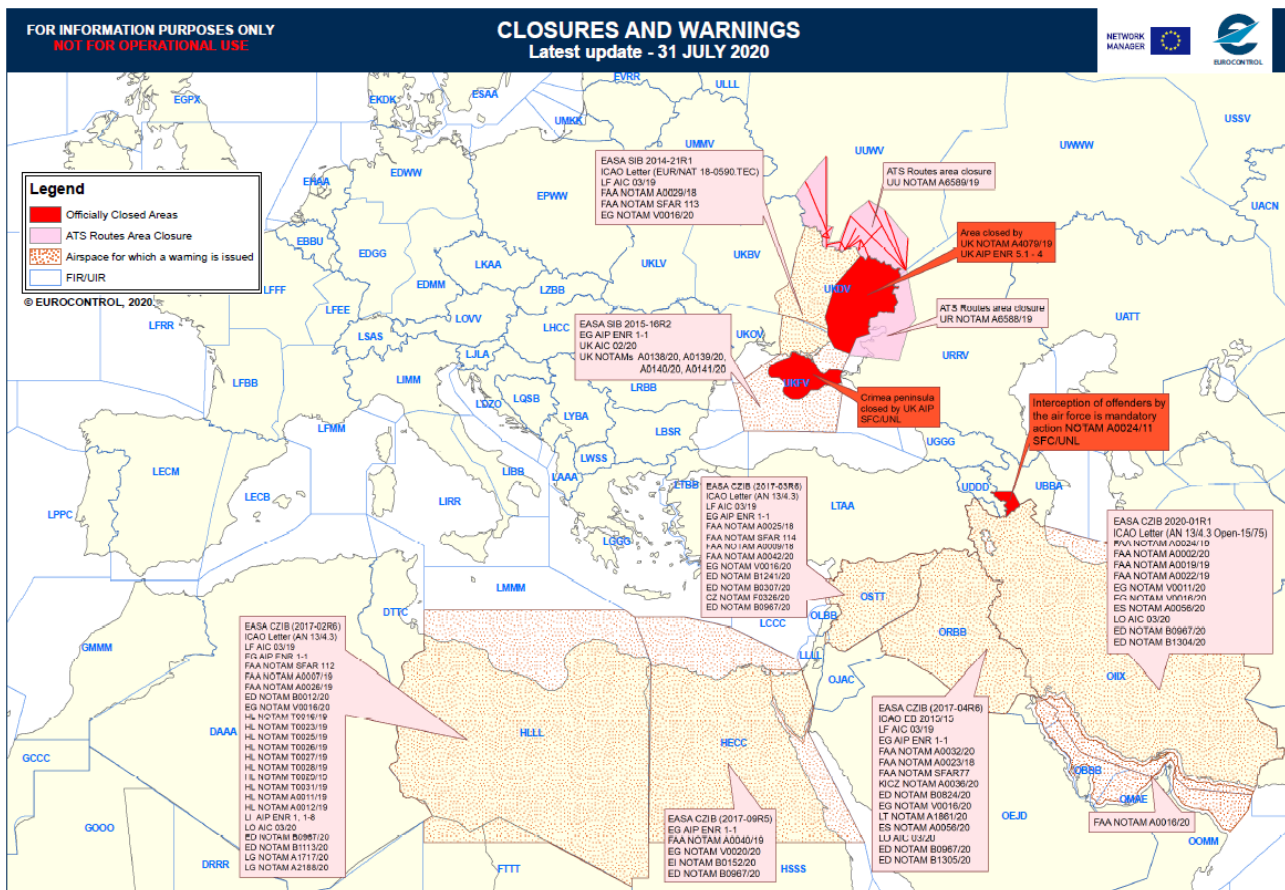


**Figure 6 :** Airspace unavailability and closed areas in July/ August 2020



Figure 7 and Figure 8 below visualise the impact of the mentioned airspace unavailability (see Figure 6 above) by comparing traffic flows in August 2013 and August 2020.

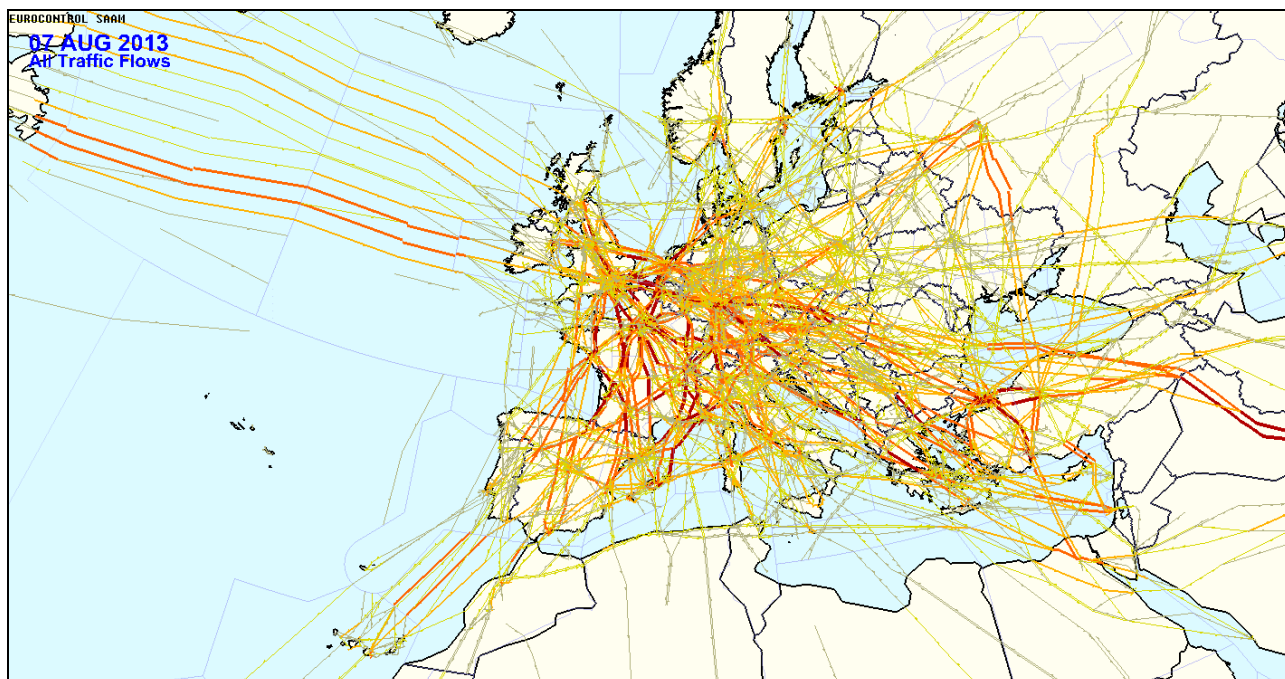


**Figure 7 :** 24h traffic situation Wednesday, 7 August 2013 (flight planned)

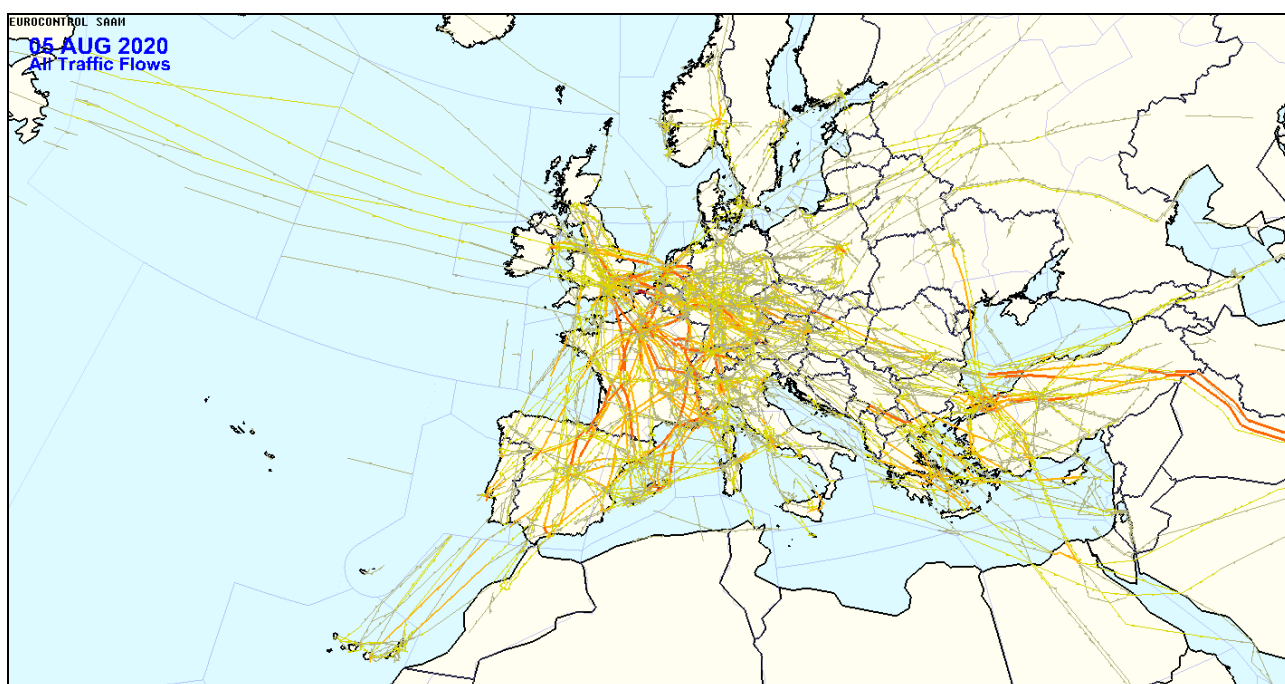


**Figure 8 :** 24h traffic situation Wednesday, 5 August 2020 (flight planned, impacted by nCoV-2019 lockdown)

The comparison between the potential (RTE-DES) and actual (RTE-FPL) savings/ losses related to the different parameters is depicted in the graphs below (see Figure 9 to Figure 12).

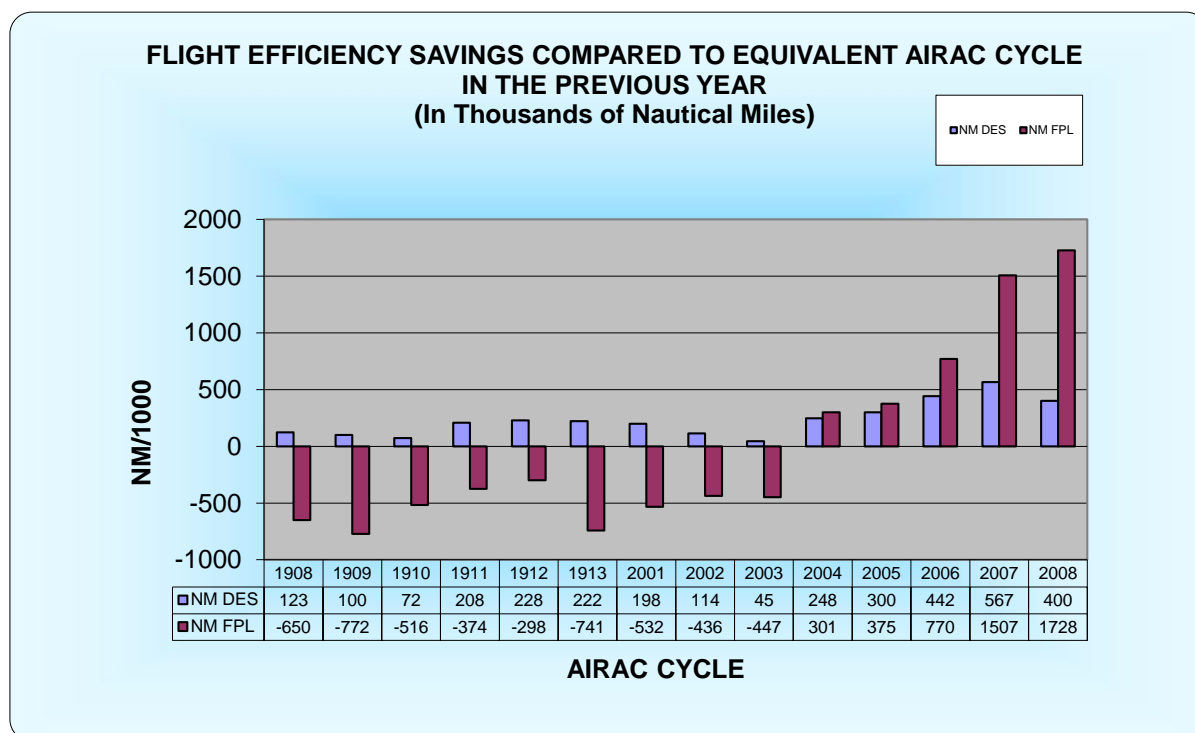


**Figure 9 :** Flight Efficiency savings/ losses in Thousands of Nautical Miles

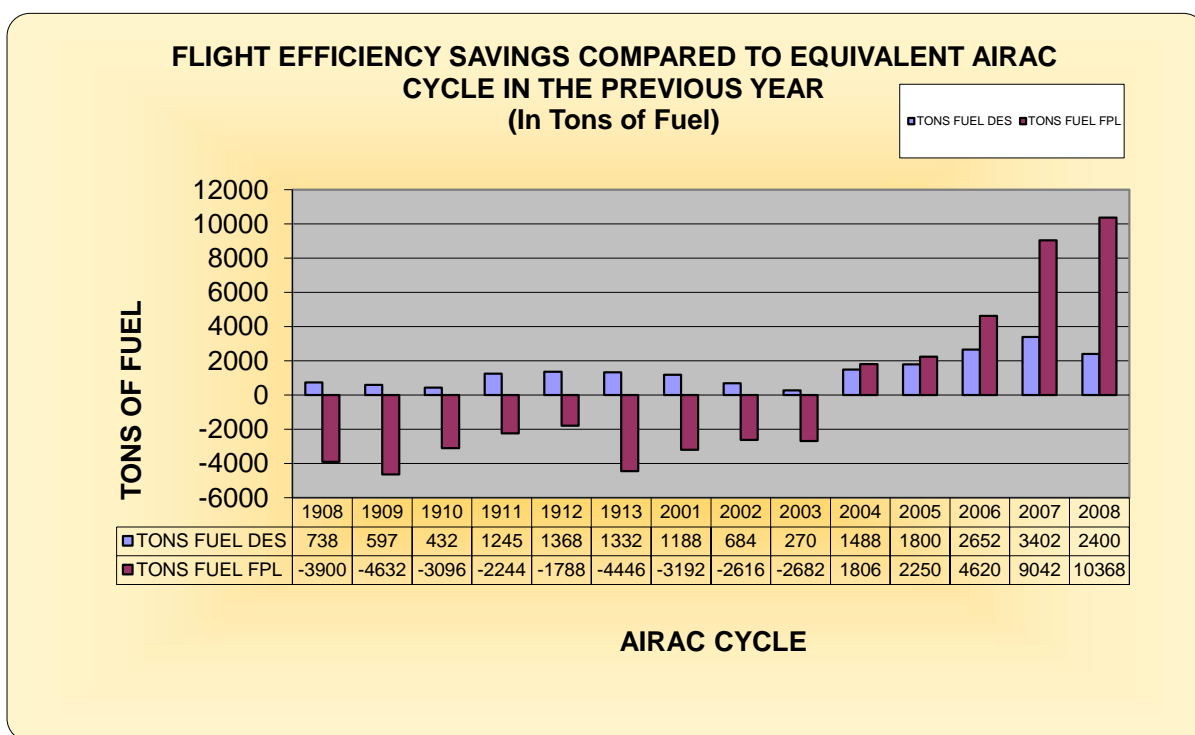


**Figure 10 :** Flight Efficiency savings/ losses in Tons of Fuel



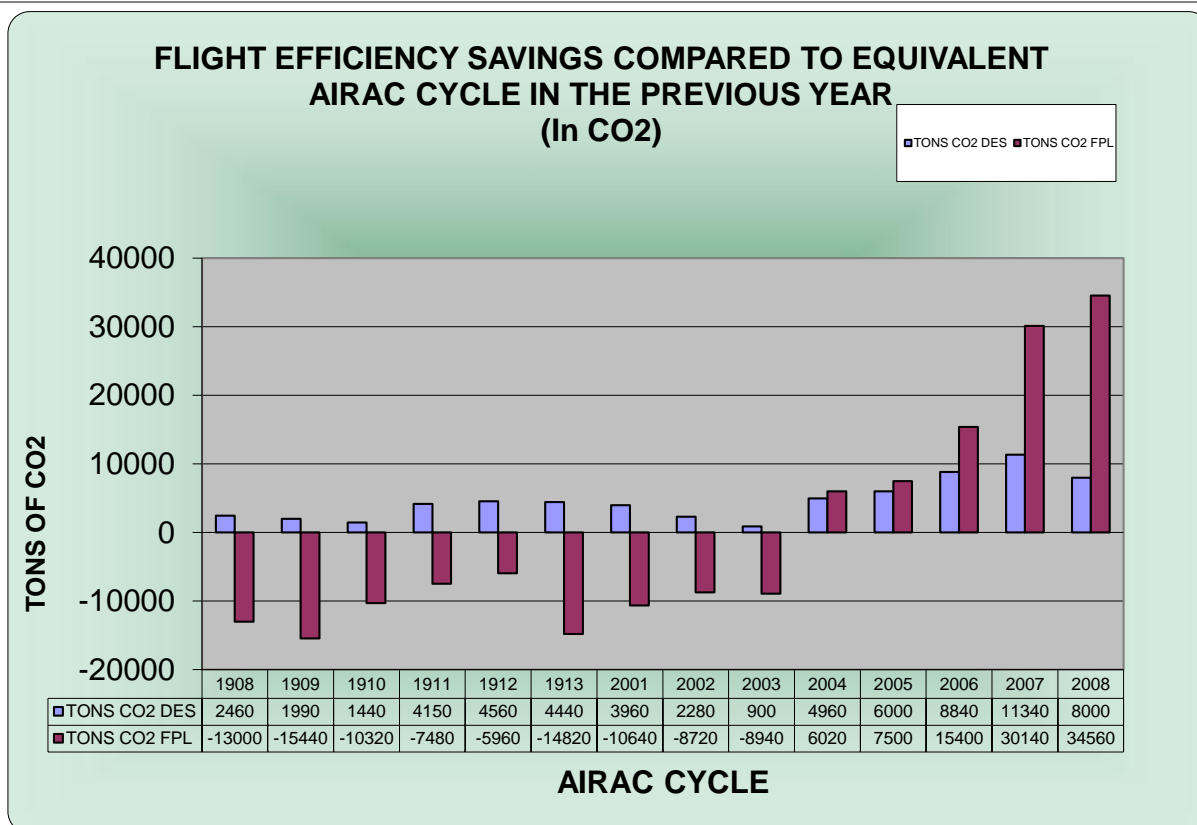

**Figure 11 :** Flight Efficiency savings/ losses in CO2

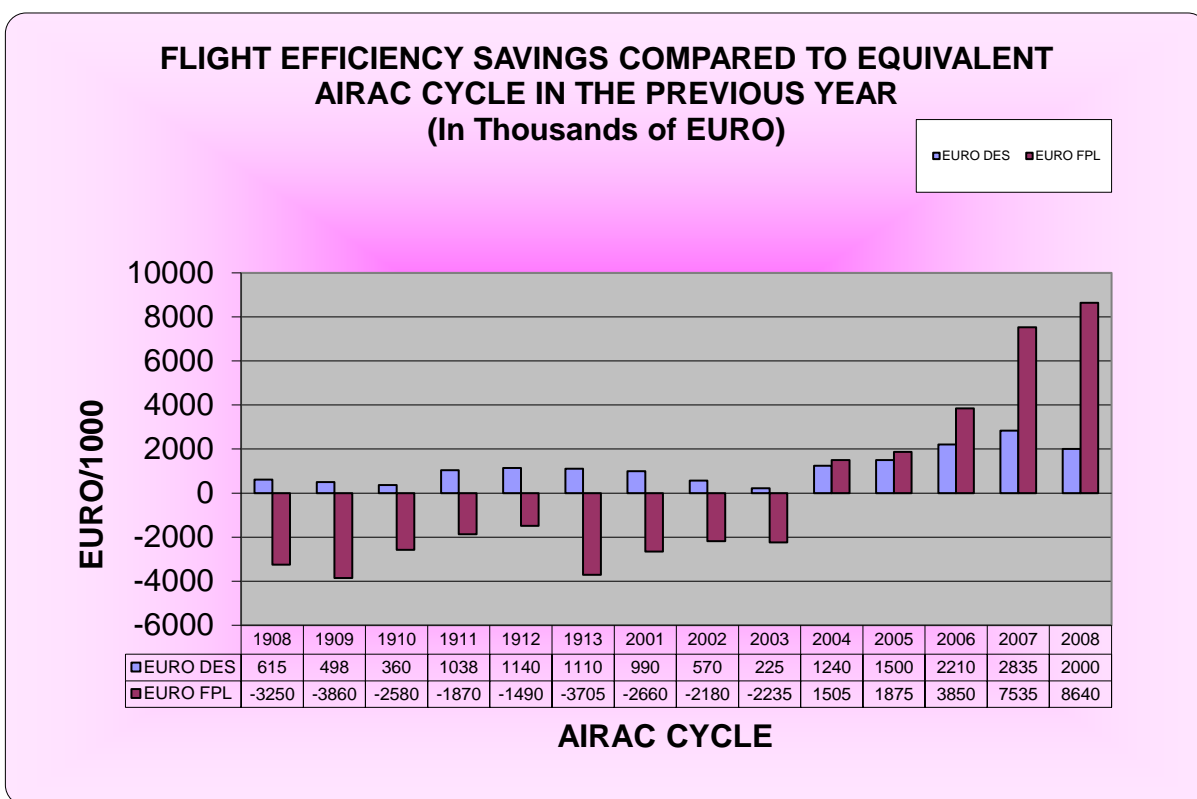

**Figure 12 :** Flight Efficiency savings/ losses in Thousands of EURO

Note: For additional information on ATFM delay that could impact on network efficiency consult the NM Monthly Network Operations Reports, accessible via:  
<https://www.eurocontrol.int/library?f%5B0%5D=product%3A807>

### 3.4.4 BENEFITS AND ASSESSMENT OF RTE-RAD EVOLUTIONS


The decrease of the RAD indicator is due to improvements in airspace design and the removal of RAD restrictions. More actions will be required to ensure that the KPI based on the RAD indicator follows trends similar to the airspace design indicator/ DES as well as to ensure that the target set in the Network Manager Performance Plan is reached.

### 3.5 FREE ROUTE AIRSPACE/ FRA EVOLUTION

FRA implementation leads to improved flight efficiency and has an economic impact in terms of fuel savings as well as notable environmental impact on climate in terms of reduced CO2 emissions.

Full H24 Free Route Airspace implementation has taken place within the airspace of the following States: Albania, Armenia, Austria, Belgium - Maastricht UAC, Bosnia and Herzegovina, Bulgaria, Croatia, Denmark, Estonia, Finland, Georgia, Germany (some German ACC/UAC cells including Maastricht UAC), Hungary, Ireland, Italy, Latvia, Lithuania, Luxembourg - Maastricht UAC, Malta, Moldova, Montenegro, Netherlands - Maastricht UAC, North Macedonia, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Sweden and Ukraine.

Partial implementation during night, weekend or based on permission to flight plan direct/ DCT between a defined set of points has already been provided in a large number of European States (see Figure 13 below).

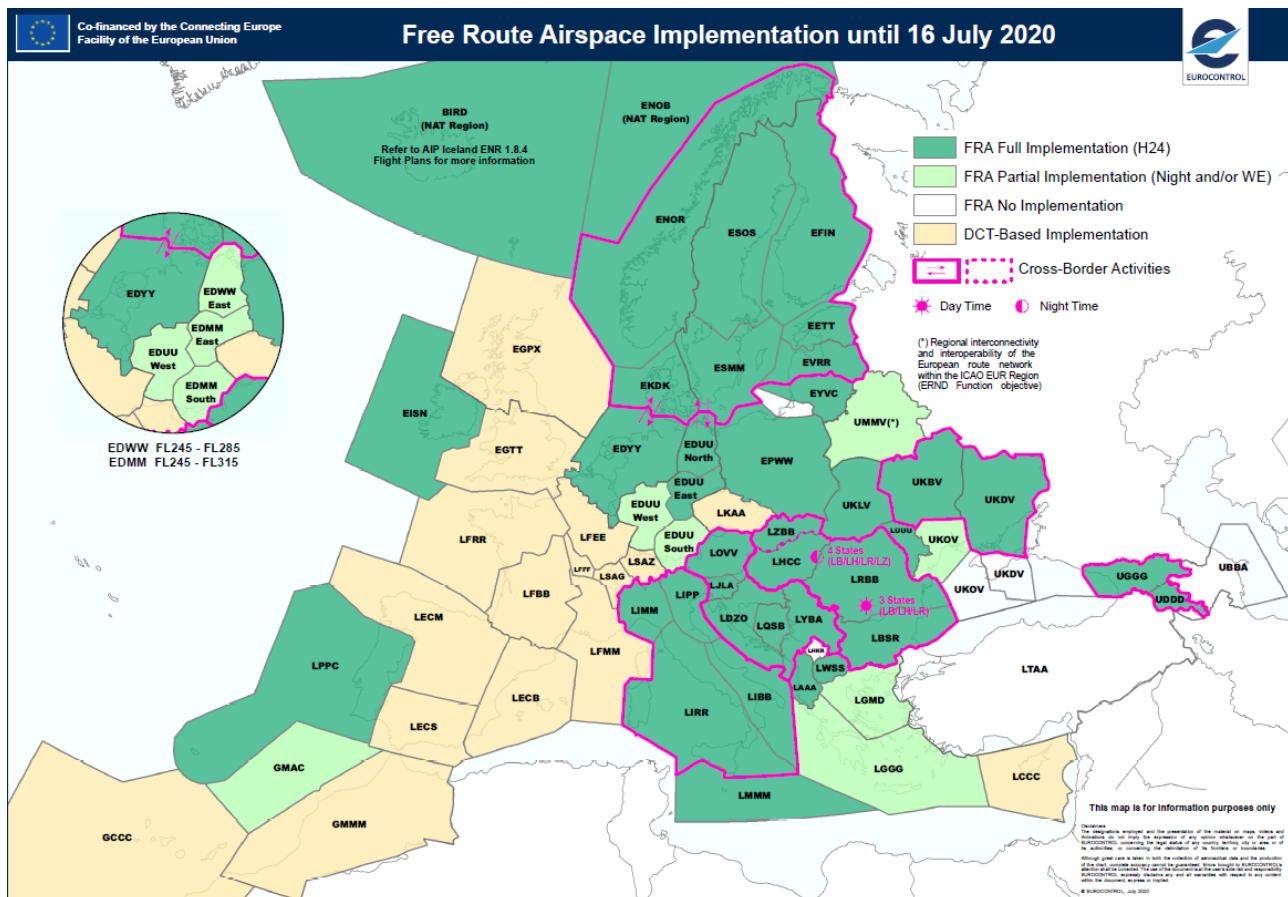

**Figure 13 :** *Airspace implementation towards Free Route Airspace*

### **3.6 ASM PERFORMANCE ASSESSMENT**

*Note: There will be no ASM Performance Assessment included for AIRAC 2004. The ASM Performance Assessments **Q1, Q2 and Q3 2020** will be included for AIRAC 2010. The ASM Performance Assessment **Q4 2020** will be included for AIRAC 2013.*

## ANNEX A: DETAILED LIST OF PROJECTS IMPLEMENTED 16 JULY 2020

The following table presents detailed information about each of the improvement proposals developed within the RND SG and implemented during the relevant AIRAC cycle. The description of the proposals is based on the information available from different sources (e.g. Airspace Users, Member States/ ANSPs, ICAO and EUROCONTROL). The table includes:

- Proposal ID number:  
A reference number to identify each proposal allowing tracing at which RND SG it was initiated.
- Project Name:  
Dedicated Name and Phase/ Step of the improvement project.
- Description:  
A detailed description of the planned improvement proposal.
- Event:  
A flag to indicate proposals with possible impact on the network.
- Objective:  
A brief description of the purpose of the enhancement measure.
- Implementation Status:  
The implementation status defined as Proposed, Planned, Confirmed or Implemented.
- Project Group:  
The Functional Airspace Block Group (FAB), Regional Focus Group (RFG), Sub-Group (SG) or any other Project Group(s) involved directly or indirectly by the proposed enhancement measure.
- Project Category:  
The nature of the proposed enhancement measure defined through Project Categories (e.g. Airspace Structure, ATC Sectors, ATS Routes, Free Route Airspace, TMA etc.).
- Serial Number / Circulation Letter / Approval Letter:  
Records the ICAO coordination procedure for implementation of airspace changes over the High Seas in accordance with the EANPG59 RASG-EUR06 Conclusion/15.
- States and Organisations:  
The States and/or Organisations involved directly or indirectly by the proposed enhancement measure.
- Originator(s):  
The States and/or Organisations who have originated the proposal.
- Comments:  
The conditions and/or pre-requisites, which have to be met in order to implement the proposal or any other relevant comment(s).

<p><b><i>Note: The list of implemented changes for this AIRAC cycle does not claim to be complete. For the correctness and verification of the relevant aeronautical information, consult official State AIP publications. The data from this document should not be used for operational purpose.</i></b></p>
--

European Route Network Improvement Plan (ERNIP) - Implementation Monitoring  
Report AIRAC 2008 (16 July 2020 - 12 August 2020)

No improvement measures recorded in ERNIP for AIRAC 2008

European Route Network Improvement Plan (ERNIP) - Implementation Monitoring  
Report AIRAC 2008 (16 July 2020 - 12 August 2020)

*Left blank intentionally*

## ANNEX B: ACRONYMS AND TERMINOLOGY

1. The following ISO-3 coding of States is used in the column *States and Organisation*:

ALB	Albania	IRN	Iran, Islamic Republic of
ARM	Armenia	IRQ	Iraq
AUT	Austria	ITA	Italy
AZE	Azerbaijan	LBY	Libyan Arab Jamahiriya
BEL	Belgium	LTU	Lithuania
BGR	Bulgaria	LUX	Luxembourg
BIH	Bosnia and Herzegovina	LVA	Latvia
BLR	Belarus	MAR	Morocco
CHE	Switzerland	MDA	Moldova, Republic of
CYP	Cyprus	MKD	North Macedonia
CZE	Czech Republic	MLT	Malta
DEU	Germany	MNE	Montenegro
DNK	Denmark	NLD	Netherlands
DZA	Algeria	NOR	Norway
EGY	Egypt	POL	Poland
ESP	Spain	PRT	Portugal
EST	Estonia	ROU	Romania
FIN	Finland	RUS	Russian Federation
FRA	France	SRB	Serbia
GBR	United Kingdom	SVK	Slovakia
GEO	Georgia	SVN	Slovenia
GRC	Greece	SWE	Sweden
HRV	Croatia	SYR	Syrian Arab Republic
HUN	Hungary	TUN	Tunisia
ISL	Iceland	TUR	Turkey
IRL	Ireland	UKR	Ukraine

MUAC	Maastricht UAC		
------	----------------	--	--

European Route Network Improvement Plan (ERNIP) - Implementation Monitoring  
Report AIRAC 2008 (16 July 2020 - 12 August 2020)

2. *BLUMED FAB, DANUBE FAB and FAB CE proposals referenced in proposal number box are coded with a unique identification number abbreviated as BM or DN or CE, respectively, following by four digits (XXXX) (example BM0001 or DN0001 or CE0001).*
3. *The content of each proposal is an indication of State's intention to implement the relevant airspace improvement but don't represent a copy of any official publication. For the correctness and verification of the relevant aeronautical information consult official State AIP publication. The data from this document should not be used for operational purposes.*



European Route Network Improvement Plan (ERNIP) - Implementation Monitoring  
Report AIRAC 2008 (16 July 2020 - 12 August 2020)

*Left blank intentionally*



© EUROCONTROL – January 2020

This document is published by EUROCONTROL for information purposes. It may be copied in whole or in part, provided that EUROCONTROL is mentioned as the source and it is not used for commercial purposes (i.e. for financial gain). The information in this document may not be modified without prior permission from EUROCONTROL.

[www.eurocontrol.int](http://www.eurocontrol.int)