

**ASTERIX Part 21
Category 007
Appendix A
Coding rules for
"Reserved Expansion
Field"**

SUR.ET1.ST05.2000-STD-21-02

Edition	:	1.5
Edition Date	:	October 2016
Status	:	Released Issue
Class	:	General Public

DOCUMENT IDENTIFICATION SHEET

DOCUMENT DESCRIPTION

Document Title
Coding rules for "Reserved Expansion Field"

EWP DELIVERABLE REFERENCE NUMBER

PROGRAMME REFERENCE INDEX

EDITION : 1.5

EDITION DATE : October 2016

Abstract

Keywords

CONTACT PERSON : A. Engel

TEL : +32-2-729 3355

DIVISION : DPS/STAN

DOCUMENT STATUS AND TYPE

STATUS	CATEGORY	CLASSIFICATION
Working Draft <input type="checkbox"/>	Executive Task <input type="checkbox"/>	General Public <input checked="" type="checkbox"/>
Draft <input type="checkbox"/>	Specialist Task <input type="checkbox"/>	EATCHIP <input type="checkbox"/>
Proposed Issue <input type="checkbox"/>	Lower Layer Task <input checked="" type="checkbox"/>	Restricted <input type="checkbox"/>
Released Issue <input checked="" type="checkbox"/>		

ELECTRONIC BACKUP

INTERNAL REFERENCE NAME :

HOST SYSTEM	MEDIA	SOFTWARE(S)
Microsoft Windows	Type : Hard disk	
	Media Identification :	

DOCUMENT APPROVAL

This document has been approved by the ASTERIX Maintenance Group AMG.

For management approval of the complete set of ASTERIX documentation please refer to Part 1.

DOCUMENT CHANGE RECORD

The following table records the complete history of the successive editions of the present document.

EDITION	DATE	REASON FOR CHANGE	SECTIONS PAGES AFFECTED
0.1	February 2010	Creation	All
0.2	March 2010	Definition and Note to TA item updated	2.3
1.0	April 2010	Changed to "Released Issue"	All
1.1	April 2011	Document Id corrected Signature Page updated	Front Page iii
1.2	June 2011	Data item M5N added Data item M4E added	2.4 2.5
1.3	July 2012	Signature Page updated X-Pulse definition updated Subfield #8 (FOM) added to M5N	iii 2.3 2.4 2.4
1.4	November 2012	V, L and G bits added to M5N, SF#5 Mode 1 Code	2.4
1.5	October 2016	Validity flag added to "NAT" in Mode 5 NEW data	2.4

TABLE OF CONTENTS

DOCUMENT IDENTIFICATION SHEET.....	ii
DOCUMENT APPROVAL.....	iii
DOCUMENT CHANGE RECORD.....	iv
TABLE OF CONTENTS.....	v
EXECUTIVE SUMMARY.....	1
1. INTRODUCTION	2
1.1 Scope	2
2. DESCRIPTION OF THE CONTENT OF RESERVED EXPANSION FIELD	3
2.1 Length Indicator	3
2.2 Items indicator	4
2.3 TA Target Altitude	5
2.4 M5N Mode 5 New.....	7
2.5 M4E.....	19

EXECUTIVE SUMMARY

1. INTRODUCTION

1.1 Scope

This document describes the way to encode information in the Reserved Expansion Field of ASTERIX Cat 007 (Directed Interrogations).


2. DESCRIPTION OF THE CONTENT OF RESERVED EXPANSION FIELD

2.1 Length Indicator

Definition : This field indicates the total length in octets of the Reserved Expansion Field (including the REF length indicator itself)

Format : One-octet fixed length Data Item

Structure:

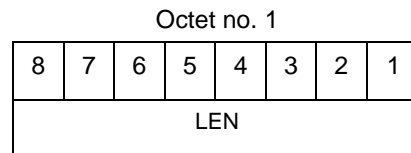

bits 8-1

(LEN)

Length of REF in octets,
including the Length Indicator
itself.

Encoding Rule :

This item shall be present in every REF

2.2

Items indicator

Definition : This field indicates what are the items encoded in the REF

Format : One-octet fixed length Data Item

Structure:

Octet no. 1

8	7	6	5	4	3	2	1
TA	M5N	M4E	0	0	0	0	0

bit 8 (TA) = 0 Target Altitude is not present in the REF

= 1 Target Altitude is present in the REF

bit 7 (M5N) = 0 Mode 5 New is not present in the REF

= 1 Mode 5 New is present in the REF

bit 6 (M4E) = 0 Extended Encoding for Mode 4 is not present in the REF

= 1 Extended Encoding for Mode 4 is present in the REF

bits 5/1 Spare bits set to 0

Encoding Rule :

This item shall be present in every REF

2.3

TA Target Altitude

Definition: Potential height of a target to be interrogated. The height shall use mean sea level as the zero reference level.

Format: Four-octet fixed length Data Item.

Structure:

Octet no. 1								Octet no. 2							
32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17
0	0	TA _{max}											LSB		

Octet no. 3								Octet no. 4							
16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
0	0	TA _{min}											LSB		

bits-32/31	(spare)	Spare bits, set to 0
bits-30/17	(TA _{max})	Maximum value of potential target altitude
bit 17	(LSB)	=25ft
bits-16/15	(spare)	Spare bits, set to 0
bits-14/1	(TA _{min})	Minimum value of potential target altitude
bit 1	(LSB)	=25ft

NOTE: Negative Values are expressed in two's complement
 $TA_{min} \leq TA_{max}$


Encoding Rule :
 This Item is optional.

Application :

When operating a sensor on a moving platform (such as a ship) it is subjected to movements around the three special axes (heading, roll, pitch).

As shown in the diagram hereafter, the start and end value for the interrogation window differs depending on the movement of the sensor. In order to compensate for these variations, it is required to indicate to the sensor the altitude of the target in order to calculate the potential differences in the start and end angle of the interrogation window.

This REF implements the capability to indicate to the sensor the potential height band in which the target to be interrogated can be expected.

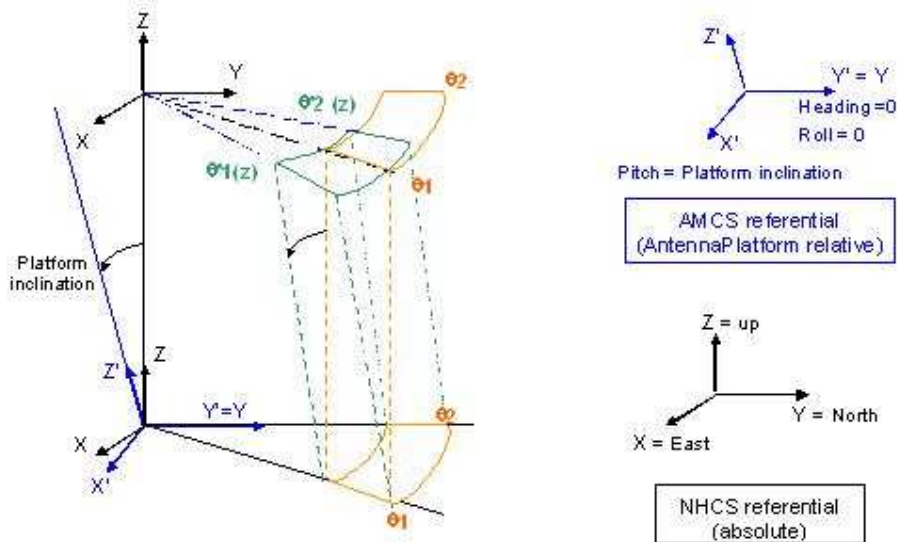

2.4

M5N Mode 5 New

Definition: Mode 5 Data/Reports, Extended Mode 1 Code and X pulse following the updated NATO format for the National Origin code

Format: Compound data item comprising of a primary subfield of up to two octets, followed by the indicated subfields.

Note: In 2011 NATO has modified the format of the National Origin information available in subfield 2 of the Mode 5 data item (I007/085). The information for National Origin and Mission Code were combined into a 11-bit long field. In order to maintain backwards compatibility and to ease the use of the new layout, the original Mode 5 data item (I007/085) was copied into this Reserved Expansion Field and the layout of subfield #2 adapted.

The new layout is reflected in this data item M5N and shall be used by equipment prepared for the new National Origin system.

Equipment certified to the previous encoding shall continue to use the data item MD5 corresponding to the 5-bit National Origin / 6-bit Mission Code as described in data item I007/085 of the main ASTERIX category 007 specification.

Structure of Primary Subfield of Compound Data Item:

Octet no. 1

16	15	14	13	12	11	10	9
SUM	PMN	POS	GA	EM1	TOS	XP	FX

Octet no. 2

8	7	6	5	4	3	2	1
FOM	0	0	0	0	0	0	FX

- bit-16, octet 1 (SUM) Subfield #1: Mode 5 Summary
 =0 Absence of Subfield #1
 =1 Presence of Subfield #1
- bit-15, octet 1 (PMN) Subfield #2: Mode 5 PIN/ National Origin
 =0 Absence of Subfield #2
 =1 Presence of Subfield #2
- bit-14, octet 1 (POS) Subfield #3: Mode 5 Reported Position
 =0 Absence of Subfield #3
 =1 Presence of Subfield #3
- bit-13, octet 1 (GA) Subfield #4: Mode 5 GNSS-derived Altitude
 =0 Absence of Subfield #4
 =1 Presence of Subfield #4
- bit-12, octet 1 (EM1) Subfield #5: Extended Mode 1 Code in Octal Representation
 =0 Absence of Subfield #5
 =1 Presence of Subfield #5
- bit-11, octet 1 (TOS) Subfield #6: Time Offset for POS and GA.
 =0 Absence of Subfield #6
 =1 Presence of Subfield #6
- bit-10, octet 1 (XP) Subfield #7: X Pulse Presence
 =0 Absence of Subfield #7
 =1 Presence of Subfield #7

bit-9, octet 1 (FX) = 0 End of Primary Subfield
= 1 Extension of Primary
Subfield into next octet

bit-8, octet 2 (FOM) Subfield #8: Figure of Merit
=0 Absence of Subfield #8
=1 Presence of Subfield #8

bits-7/2, octet 2 (spare) Spare bits, set to 0

bit-1, octet 2 (FX) = 0 End of Primary Subfield
= 1 Extension of Primary
Subfield into next octet

**Structure of Subfield #1:
Mode 5 Summary:**

Octet no. 1

8	7	6	5	4	3	2	1
M5	ID	DA	M1	M2	M3	MC	0

bit-8	(M5)	= 0 No Mode 5 interrogation = 1 Mode 5 interrogation
bit-7	(ID)	= 0 No authenticated Mode 5 ID reply/report = 1 Authenticated Mode 5 ID reply/report
bit-6	(DA)	= 0 No authenticated Mode 5 Data reply or Report = 1 Authenticated Mode 5 Data reply or Report (i.e any valid Mode 5 reply type other than ID)
bit-5	(M1)	= 0 Mode 1 code not present or not from Mode 5 reply/report = 1 Mode 1 code from Mode 5 reply/report.
bit-4	(M2)	= 0 Mode 2 code not present or not from Mode 5 reply/report = 1 Mode 2 code from Mode 5 reply/report.
bit-3	(M3)	= 0 Mode 3 code not present or not from Mode 5 reply/report = 1 Mode 3 code from Mode 5 reply/report.
bit-2	(MC)	= 0 Mode C altitude not present or not from Mode 5 reply/report = 1 Mode C altitude from Mode 5 reply/report
bit-1	Spare bit set to 0	

**Structure of Subfield #3:
Mode 5 Reported Position**

Octet no. 1								Octet no. 2							
48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33
Latitude in WGS 84															

Octet no. 3								Octet no. 4							
32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17
(LSB)								Longitude in WGS 84							

Octet no. 5								Octet no. 6							
16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
(LSB)															

bits-48/25 (LAT) Latitude in WGS 84

bits-24/1 (LON) Longitude in WGS 84

Notes : Latitude in WGS 84 is expressed as a 24-bit two's complement number.
Range $-90^\circ \leq \text{latitude} \leq 90^\circ$. Sign convention: North is positive.
LSB = $180/2^{23}$ degrees = $2.145767 \cdot 10^{-05}$ degrees

Longitude in WGS 84 is expressed as a 24-bit two's complement number.
Range $-180^\circ \leq \text{longitude} < 180^\circ$. Sign convention: East is positive.
LSB = $180/2^{23}$ degrees = $2.145767 \cdot 10^{-05}$ degrees

The resolution implied by the LSB is better than the resolution with which Mode 5 position reports are transmitted from aircraft transponders using currently defined formats.

**Structure of Subfield #4:
Mode 5 GNSS-derived Altitude**

Octet no. 1							Octet no. 2								
16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
0	RES	GA											(LSB)		

bit-16	(spare)	spare bit set to 0
bit-15	(RES)	Resolution with which the GNSS-derived Altitude (GA) is reported.
	=0	GA reported in 100 ft increments,
	=1	GA reported in 25 ft increments.
bits-14/1	(GA)	GNSS-derived Altitude of target, expressed as height above WGS 84 ellipsoid. GA is coded as a 14-bit two's complement binary number with an LSB of 25 ft. irrespective of the setting of RES. The minimum value of GA that can be reported is -1000 ft.

**Structure of Subfield #5:
Extended Mode 1 Code in Octal Representation**

Octet 1								Octet 2							
16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
V	G	L	0	Extended Mode 1 Code											
				A4	A2	A1	B4	B2	B1	C4	C2	C1	D4	D2	D1

- bit-16 (V) = 0 Code not validated (see note 2)
= 1 Code validated (see note 2)
- bit-15 (G) = 0 Default
= 1 Garbled code
- bit-14 (L) = 0 Mode-3/A code derived from the reply of the transponder
= 1 Mode-3/A code not extracted during the last scan
- bit-13 (spare) spare bit, set to "0"
- bits-12/1 (EM1) Extended Mode 1 Code in octal representation

Note 1: If Subfield #1 is present, the M1 bit in Subfield #1 indicates whether the Extended Mode 1 Code is from a Mode 5 reply or a Mode 1 reply. If Subfield #1 is not present, the Extended Mode 1 Code is from a Mode 1 reply.

Note 2: For reasons of backwards compatibility the logic for the setting of the V-bit was inverted compared to other similar data items.

**Structure of Subfield #6 of Compound Data Item:
Time Offset for POS and GA**

Octet no. 1

8	7	6	5	4	3	2	1
TOS							(LSB)

bits-8/1 (TOS)

Time Offset coded as a twos complement number with an LSB of 1/128 s. The time at which the Mode 5 Reported Position (Subfield #3) and Mode 5 GNSS-derived Altitude (Subfield #4) are valid is given by Time of Day (I048/140) plus Time Offset.

Note:

TOS shall be assumed to be zero if Subfield #6 is not present.

**Structure of Subfield #7 of Compound Data Item:
X Pulse Presence**

Octet no. 1

8	7	6	5	4	3	2	1
0	0	XP	X5	XC	X3	X2	X1

bits-8/7 spare bits set to zero

bit-6	(XP)	X-pulse from Mode 5 PIN reply/report = 0 X-Pulse not present. = 1 X-pulse present.
bit-5	(X5)	X-pulse from Mode 5 Data reply or Report. = 0 X-pulse set to zero or no authenticated Data reply or Report received. = 1 X-pulse set to one (present).
bit-4	(XC)	X-pulse from Mode C reply = 0 X-pulse set to zero or no Mode C reply = 1 X-pulse set to one (present)
bit-3	(X3)	X-pulse from Mode 3/A reply = 0 X-pulse set to zero or no Mode 3/A reply = 1 X-pulse set to one (present)
bit-2	(X2)	X-pulse from Mode 2 reply = 0 X-pulse set to zero or no Mode 2 reply = 1 X-pulse set to one (present)
bit-1	(X1)	X-pulse from Mode 1 reply = 0 X-pulse set to zero or no Mode 1 reply = 1 X-pulse set to one (present)

NOTE to Subfield #7 (X Pulse Presence):

Within Mode 5 replies/reports, the X-Pulse can be set for the following cases:

1. In a combined Mode 1 and Mode 2 reply/report: in this case the X5 bit and the X2 bit shall be set;
2. In a combined Mode 3 and Mode C reply/report: in this case the X5 bit and the X3 bit shall be set;
3. In a Mode 5 PIN data reply/report: in this case the X5 bit and the XP bit shall be set.

The X1 bit and the XC bit are meaningless as in Mode 1 and Mode C replies/reports the X Pulse is not defined. They are kept for compatibility reasons.

**Structure of Subfield #8 of Compound Data Item:
Figure of Merit**

Octet no. 1							
8	7	6	5	4	3	2	1
0	0	0	FOM				

bits-8/6 (spare) spare bits set to zero

bits-5/1 (FOM) Figure of Merit
Position Accuracy as extracted and
provided by a Mode 5 transponder

Encoding Rule:

The Reserved Expansion Field is optional. When used to transmit M5N, it shall be sent when at least one of the following conditions is satisfied:

1. The target represented by the Monoradar Target Report has been interrogated in Mode 5.
2. A non-zero Extended Mode 1 Code is received.
3. An X-pulse is present in a Mode 5 reply/report.

If condition 1 is satisfied, then Subfield #1 (Mode 5 Summary) shall be present.

If condition 2 is satisfied then Subfield #5 (Extended Mode 1 Code in Octal Representation) shall be present.

If condition 3 is satisfied, then Subfield #7 (X Pulse Presence) shall be present.

